



Plastic Film • Paper Dielectric Capacitors
Glass Tubular • Phenolic Tubular • Phenolic Rectangular

PHOTO

TERMS AND CONDITIONS



PLASTIC CAPACITORS, INC., reserves the right to refuse any order. An order is not accepted until it is acknowledged by the Factory.

ADJUSTMENT OF CLAIMS: Claims for loss, damage or non-delivery of goods should be filed with the carrier. If necessary, we will assist you by providing copies of bills of lading, delivery receipts, etc. Claims arising due to clerical errors, shortages or incorrect parts shipment should be made within 10 days from receipt of goods. Please reference your purchase order number and our invoice number.

CANCELLATION OR DECREASE OF ORDER: Orders cannot be canceled without our consent. When possible, cancellation will be accepted without charge; for work in process, we reserve the right to charge for any expenses incurred in assembly, processing or for the purchase of raw materials for the order.

DELAYS: We cannot be responsible for delays in shipments for any reason whatsoever.

SHIPMENTS: Unless otherwise directed by your order, partial shipments will be made if the order is not complete in our stock.

TERMS OF PAYMENT: Net 30 days to accounts with credit established. F.O.B. point is located at our plant on 1100 S. Plumer Avenue, Tucson, AZ 85719.

PRICES vary with the quantity ordered, number of releases and the time span in which you schedule your order for shipment. Our quotations are generally firm for 60 days, as specified on our quote. Orders with deliveries extending into subsequent years are subject to price in effect on date of shipment. Taxes, if any, are not included in our quotation.

RETURN OF GOODS: MERCHANDISE WHICH IS TO BE RETURNED FOR CREDIT, EXCHANGE OR REPAIR CANNOT BE RETURNED WITHOUT OUR CONSENT AND ADVICE AS TO MODE OF TRANSPORTATION AND INSURANCE COVERAGE REQUIRED. PLEASE GIVE SPECIFIC REASONS FOR RETURN.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

WARNING HIGH VOLTAGE

THE VOLTAGE POTENTIALS ENCOUNTERED WITH THE USE OF MANY OF THE ITEMS IN THIS CATALOG MAY BE LETHAL. UTMOST CARE SHOULD BE EXERCISED IN THE USE OF THESE PRODUCTS TO ASSURE THAT THE VOLTAGE OR POWER SOURCE IS DISCONNECTED AND THAT THE DEVICE IS PROPERLY GROUNDED AND SHORTED BEFORE SERVICING THE EQUIPMENT INTO WHICH IT IS INSTALLED. INSTALLATION SHOULD COMPLY WITH ALL FEDERAL, STATE AND LOCAL ELECTRICAL CODE REQUIREMENTS.

LIMITED WARRANTY

PLASTIC CAPACITORS, INC. warrants its products under normal usage and service, against defects in workmanship or materials, for a period of ONE (1) YEAR from the date of delivery. The sole obligation of PLASTIC CAPACITORS under this warranty shall be to repair or replace any part which, in the opinion of PLASTIC CAPACITORS, shall prove to be defective in normal use and service within said ONE (1) YEAR period from the date of delivery. This warranty does not cover normal wear and tear. In addition, the warranty shall be null and void if the equipment is modified, improperly installed or used, or damaged by accident or neglect, or otherwise repaired by another party during the aforesaid warranty period. PLASTIC CAPACITORS reserves the right, in its sole discretion, to replace any product or part thereof, found to be defective. Defective products shall be returned, freight prepaid, directly to: PLASTIC CAPACITORS, INC., 1100 S. Plumer Avenue, Tucson, AZ 85719.

THE ABOVE WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, STATUTORY OR OTHERWISE, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.




PLASTIC CAPACITORS shall not be liable for any damages sustained by its customer or any other party arising from or relating to any product failure, including but not limited to consequential damages, nor shall PLASTIC CAPACITORS have any liability for delays in replacement or repair of its products. No agent, representative, dealer or employee of PLASTIC CAPACITORS shall have the authority to increase, alter or otherwise modify the provisions of this LIMITED WARRANTY.

1100 S. Plumer Avenue
Tucson, AZ 85719
www.plasticcapacitors.com


tel: 520.573.0221
fax: 520.573.0520



TYPE: OF 85°C GLASS CAP - PLASTIC FILM DC FILTER

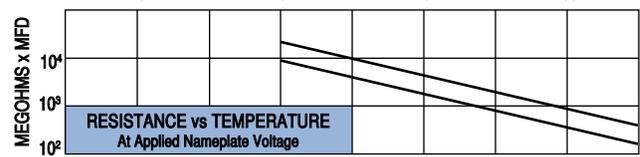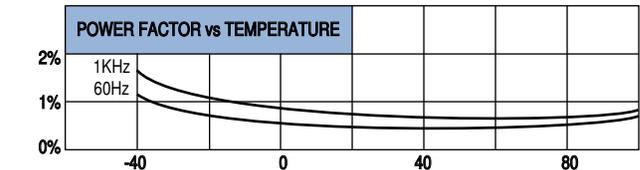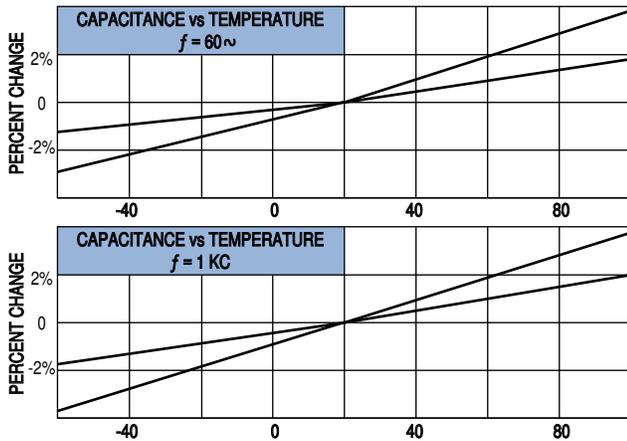

ALTITUDE: Type O F capacitors are designed for operation at barometric pressures greater than 20 inches of mercury.

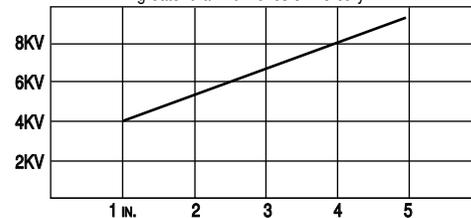

TYPE 'OF' capacitors are an improved plastic dielectric capacitor impregnated with a highly purified and inhibited Mineral Oil.

TEMPERATURE RANGE: - 55°C to 85°C with nameplate voltage applied. Derate to 60% nameplate voltage for operation at 105°C. Non-operating temperature range—65°C to 110°C, also available.

TEST VOLTAGE: Through 20KV rating, 200%; above 20KV rating, 150% of nameplate voltage. Capacitors charged for 1 minute.

CAPACITANCE TOLERANCE: Standard capacitance tolerance is $\pm 10\%$. Also available in $\pm 5\%$ and $\pm 2\%$ tolerance. Standard tolerances not marked.

LIFE: Type 'OF' capacitors are designed for continuous operation at 85°C for 10,000 hours at an ambient temperature of 85°C with nameplate voltage applied. A suitable test to indicate compliance is operation for 250 hours at 85°C with 140% nameplate voltage applied. Compliance is indicated by not more than one failure in a sample lot of 12.

MOUNTING POSITION: Any safe operating voltage vs tube length at 50,000 feet.

RIPPLE: The peak ripple voltage plus the DC voltage should not exceed the nameplate voltage. Acceptable peak to peak ripple voltage in percent of nameplate voltage follows.

Frequency CPS	Peak to Peak Ripple Voltage %	Frequency CPS	Peak to Peak Ripple Voltage %
60	25	400	5
120	20	1000	3

Type 'OF' capacitors are designed to pass the tests and exceed the requirements of MIL-C-25D (Characteristic 'E') except for high altitude flash-over (See Altitude). **VIBRATION & SHOCK** MIL-C-25D consult factory for recommended mounting.


DIELECTRIC RESISTANCE (parallel resistance) is indicated by the curve R vs T. This curve expresses limits with nameplate voltage applied and 2 minute electrification time. Limitations 104 megohms x mfd. or 104 megohms whichever is less at room temperature.

TERMINALS are 8-32 x 3/8" long for diameters of 3/4" or greater. Smaller diameters are supplied with #18 tinned copper axial pigtailed. Other size studs, pigtailed and solder lugs are available.

TYPE: OF

85°C GLASS CAP - PLASTIC FILM DC FILTER

CONTAINER is a hard glass pillar with silver fused to each end. A non-magnetic metal ferrule is soldered to each end assuring hermetic sealing. The brass stud is tin plated.
THE AIR BUBBLE in each unit may or may not be visible between the label and the glass tube.

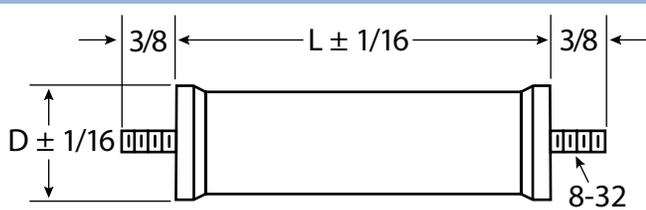

All glass containers with 'D' dimensions of 19/32 have 2-1/2 inch long 18 A.W.G. (.040") tinned copper pigtail leads.

PART NUMBER	CAP MFD	VOLTS DC	DIMENSIONS	
			L	D
OF20-102	.001	2000	1 3/16	19/32
OF20-202	.002	2000	1 3/16	19/32
OF20-502	.005	2000	1 3/16	19/32
OF20-103	.01	2000	1 3/16	19/32
OF20-203	.02	2000	1 9/16	19/32
OF20-503	.05	2000	1 3/4	3/4
OF20-104	.1	2000	2 1/4	3/4
OF20-254	.25	2000	2 3/4	29/32
OF20-504	.5	2000	2 1/4	13/8
OF30-102	.001	3000	1 3/16	19/32
OF30-202	.002	3000	1 3/16	19/32
OF30-502	.005	3000	1 3/16	19/32
OF30-103	.01	3000	1 9/16	19/32
OF30-203	.02	3000	1 3/4	3/4
OF30-503	.005	3000	2 1/4	3/4
OF30-104	.1	3000	1 3/4	1 1/8
OF30-254	.25	3000	2	1 3/8
OF30-504	.5	3000	2 3/4	1 5/8
OF40-102	.001	4000	1 3/16	19/32
OF40-202	.002	4000	1 3/16	19/32
OF40-502	.005	4000	1 3/16	19/32
OF40-103	.01	4000	1 3/16	3/4
OF40-203	.02	4000	1 3/4	3/4
OF40-503	.005	4000	2	13/16
OF40-104	.1	4000	2	1 1/8
OF40-254	.25	4000	2 1/4	1 5/8
OF40-504	.5	4000	1 3/4	1 5/8
OF50-201	.0002	5000	13/16	19/32
OF50-501	.0005	5000	13/16	19/32
OF50-102	.001	5000	1 3/16	19/32
OF50-202	.002	5000	1 3/16	19/32
OF50-502	.005	5000	1 5/8	19/32
OF50-103	.01	5000	1 3/4	3/4
OF50-203	.02	5000	2 1/4	3/4
OF50-503	.05	5000	2 1/4	29/32
OF50-104	.1	5000	1 3/16	1 3/8
OF50-254	.26	5000	3	1 5/8
OF50-504	.5	5000	6	1 5/8
OF60-101	.0001	6000	1 9/16	19/32
OF60-201	.0002	6000	1 9/16	19/32
OF60-501	.0005	6000	1 9/16	19/32
OF60-102	.001	6000	1 9/16	19/32
OF60-202	.002	6000	1 9/16	19/32
OF60-502	.005	6000	1 5/8	19/32
OF60-103	.01	6000	1 3/4	3/4
OF60-203	.02	6000	2 1/4	3/4
OF60-503	.05	6000	3 1/4	29/32
OF60-104	.1	6000	3	1 3/8
OF60-254	.25	6000	4	1 5/8
OF60-504	.5	6000	6 3/4	1 5/8

PART NUMBER	CAP MFD	VOLTS DC	DIMENSIONS	
			L	D
OF80-101	.0001	8000	1 9/16	19/32
OF80-201	.0002	8000	1 9/16	19/32
OF80-501	.0005	8000	1 9/16	19/32
OF80-102	.001	8000	1 9/16	19/32
OF80-202	.002	8000	1 3/4	19/32
OF80-502	.005	8000	1 3/4	3/4
OF80-103	.01	8000	2 1/4	3/4
OF80-203	.02	8000	2 3/4	29/32
OF80-503	.05	8000	2 3/4	1 3/8
OF80-104	.1	8000	3 5/8	1 5/8
OF80-204	.2	8000	7	1 5/8
OF100-101	.0001	10KV	1 5/8	19/32
OF100-201	.0002	10KV	1 5/8	19/32
OF100-501	.0005	10KV	1 5/8	19/32
OF100-102	.001	10KV	1 5/8	19/32
OF100-202	.002	10KV	1 5/8	3/4
OF100-502	.005	10KV	1 3/4	13/16
OF100-103	.01	10KV	2 1/4	29/32
OF100-203	.02	10KV	2 3/4	1 1/8
OF100-503	.05	10KV	2 3/4	1 5/8
OF100-603	.06	10KV	3	1 5/8
OF100-104	.1	10KV	5	1 5/8
OF150-101	.0001	15KV	2 1/4	19/32
OF150-201	.0002	15KV	2 1/4	19/32
OF150-501	.0005	15KV	2 1/4	19/32
OF150-102	.001	15KV	2 1/4	3/4
OF150-202	.002	15KV	2 1/4	3/4
OF150-502	.005	15KV	2 3/4	1 1/8
OF150-103	.01	15KV	3 3/4	1 1/8
OF150-203	.02	15KV	4 1/4	1 3/8
OF150-503	.05	15KV	7	1 5/8
OF150-603	.06	15KV	8	1 5/8
OF200-101	.0001	20KV	3 1/4	19/32
OF200-201	.0002	20KV	2 1/4	19/32
OF200-501	.0005	20KV	2 1/4	19/32
OF200-102	.001	20KV	2 1/4	3/4
OF200-202	.002	20KV	2 1/4	13/16
OF200-502	.005	20KV	2 3/4	1 1/8
OF200-103	.01	20KV	3 3/4	1 1/8
OF200-203	.02	20KV	4 1/4	1 5/8
OF200-403	.04	20KV	7 1/4	1 5/8
OF300-101	.0001	30KV	4 9/16	19/32
OF300-201	.0002	30KV	4 9/16	19/32
OF300-501	.0005	30KV	4 9/16	19/32
OF300-102	.001	30KV	5	3/4
OF300-202	.002	30KV	5	29/32
OF300-502	.005	30KV	5	1 3/8
OF300-103	.01	30KV	6 1/2	1 5/8
OF300-203	.02	30KV	9	1 5/8
OF400-101	.0001	40KV	5 3/4	3/4
OF400-201	.0002	40KV	5 3/4	3/4
OF400-501	.0005	40KV	5 3/4	3/4
OF400-102	.001	40KV	6 1/2	13/16
OF400-202	.002	40KV	6 1/2	1 1/8
OF400-502	.005	40KV	6 1/2	1 5/8
OF400-602	.006	40KV	8	1 5/8
OF500-101	.0001	50KV	8 1/4	3/4
OF500-201	.0002	50KV	8 1/4	3/4
OF500-501	.0005	50KV	8 1/4	3/4
OF500-102	.001	50KV	8 1/4	13/16
OF500-202	.002	50KV	8 1/4	1 1/8
OF500-502	.005	50KV	10 3/4	1 3/8
OF500-602	.006	50KV	10 3/4	1 3/8
OF600-101	.0001	60KV	10	3/4
OF600-201	.0002	60KV	10	3/4
OF600-501	.0005	60KV	10	3/4
OF600-102	.001	60KV	10	29/32
OF600-202	.002	60KV	10	1 3/8
OF600-502	.005	60KV	11 1/2	1 5/8

TYPE: LQ

65°C PHENOLIC CAP - PLASTIC FILM DC FILTER

PHYSICAL DESCRIPTION

TYPE 'LQ' capacitors are designed for DC application such as filtering, bypass and coupling applications.

TYPE 'LQ' capacitors are offered with internal construction variations designed to meet various circuit conditions. The following suffix letters identify these constructions.

SUFFIX 'V' is extended foil (non-inductively wound), providing soldered contacts throughout. These capacitors are useful when used as a filter in a power supply which has a very low current output, or if the capacitor must supply high surge currents. They are oil impregnated, and epoxy filled.

SUFFIX 'Y' is the standard inserted tab construction for filter and bypass applications and are oil impregnated, and epoxy filled.

THE CASE is a black phenolic shell. The epoxy end fill is heat resistant and provides a positive seal to the phenolic shell.

IMPREGNANT used for suffix types 'V' and 'Y' is a highly refined, purified and inhibited combination of natural mineral oil and a synthetic oil, the flash point is greater than 145°C when measured per method 110.3.4 of specification VV-L-791.

MOUNTING POSITION: All types 'LQ' capacitors will operate satisfactorily in any mounting position.

TERMINALS are Copper-weld leads. The wire gauge and length used are functions of the case size; minimum of 1-3/4 inch length, #20 or #22 wire.

AC APPLICATIONS: The phenolic shell is a useful housing for low cost alternating current applications. By the judicious use of available low loss dielectrics, the frequency range can be extended to 30 megahertz. Submit application for recommendations.

TEST CONDITIONS

TEST VOLTAGE: Terminal to terminal is 150% rated voltage for one minute without a permanent breakdown.



CAPACITANCE TOLERANCE: Standard capacitance tolerance is $\pm 20^\circ\text{C}$. Also available in $\pm 10^\circ\text{C}$ tolerance. Standard tolerances not marked.

TEMPERATURE RANGE: -20°C to 65°C with nameplate voltage applied.

DIELECTRIC RESISTANCE is given in the R vs. T graph. Measurement can be made with nameplate voltage. Capacitance values under 1 mfd. need not exceed two times the graph value per mfd. at any temperature.

LIFE: Type 'LQ' capacitors are designed for continuous operation at 65°C for 10,000 hours.

HUMIDITY RESISTANCE: Test will meet requirements of EIA RS 164.

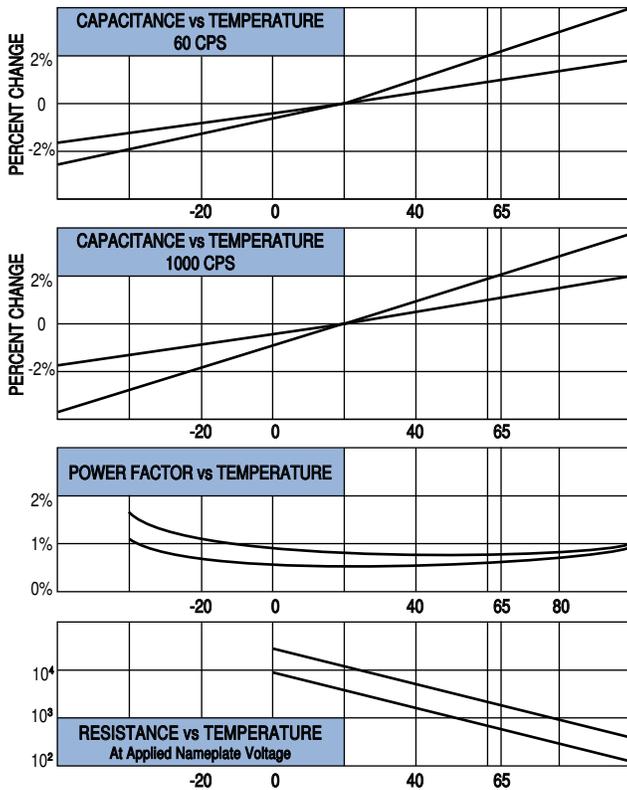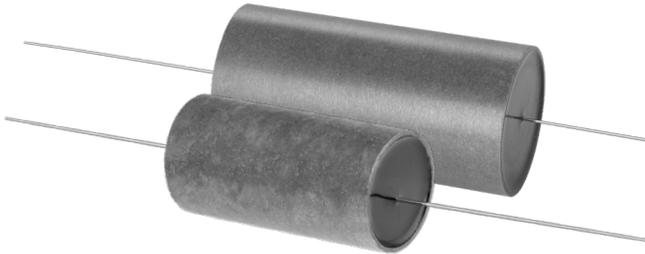

RIPPLE: The peak ripple voltage plus the DC voltage should not exceed the nameplate voltage. Acceptable peak to peak ripple voltage in percent of nameplate voltage follows.


FREQUENCY Hz	PEAK TO PEAK RIPPLE VOLTAGE %
60	25
120	20
400	5
1000	3

TYPE: LJ PAPER-MYLAR* HIGH VOLTAGE CAPACITORS


TYPE 'LJ' CAPACITORS are designed for high voltage application with plastic-paper dielectric capacitor elements. Connections are made to the extended foil sections with medium-heavy wiring allowing large discharge current. Consult factory for current and repetition rate limits. Applications include; power supply filters, discharge, pulse forming networks, bypass, and arc and spark suppression.

TEMPERATURE RANGE is -55°C to 65°C. No derating of voltage is necessary over this range.

CAPACITANCE TOLERANCE: Standard is $\pm 10\%$, however Type 'LJ' capacitors may be ordered with a $\pm 5\%$ tolerance.

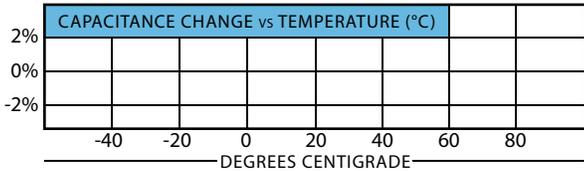


DIELECTRIC RESISTANCE (parallel resistance) is indicated in the graph below. This graph expresses limits with the nameplate voltage applied. Minimum acceptable resistance is 10,000 megohms per microfarad or 10,000 megohms. Whichever is less.

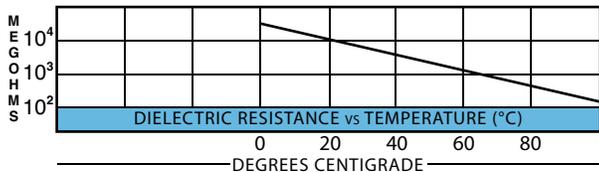

PEAK RIPPLE VOLTAGE plus the DC voltage must not exceed the nameplate voltage. As a general rule, the acceptable peak-to-peak ripple voltage (expressed as a percent of the nameplate voltage) for a given frequency is listed below. This is not valid at higher voltages and larger capacitance values. An inquiry should be sent to the factory regarding suitability of the application.

FREQUENCY Hz	RIPPLE VOLTAGE %
60	25
120	20
400	5
1000	3

TEST VOLTAGE is 150% of nameplate voltage for two minutes in air at room temperature.

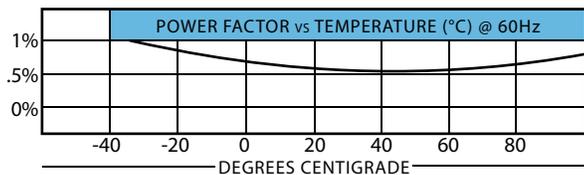

Other styles are available—see outline drawings. All are not suitable for all voltages. The styles shown are with a mounting foot. Dropping the suffix "F" indicates no foot supplied.

HOW TO ORDER: Select the part number from the list and add suffix "-5", if 5% capacitance tolerance is required. For other styles consult factory.

TYPE 'LJ' CAPACITORS are oil-impregnated, oil-filled and hermetically sealed.


IMPREGNANT is a highly refined/purified and inhibited mineral oil with a flash point greater than 145°C when measured per method 110.3.4 specification V V-L-791.

DIELECTRIC is a combination of polyester film and Kraft capacitor tissue. Aluminum foils constitute the plates and the capacitor sections have extended foils insuring low I²R losses and low inductance.

CASE is fabricated paper-phenolic with flexible side walls, permitting the case to be completely filled with the impregnant. This feature provides expansion and contraction of the oil over the temperature range.

TERMINALS on Type 'LJ' suffix B (for styles B) are 1/4-20 brass screws. Other size terminals or threaded inserts may be supplied on special order.

MOUNTING FOOT has holes for 1/4-20 screw—small bases have 2 holes and larger base sizes have 4 holes.

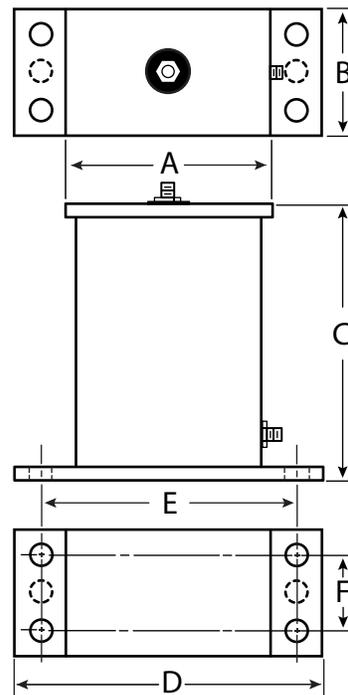

STANDARD CONTAINER SIZES

A - 2 3/4	3 3/4	4 3/4	3 3/4
B - 1 3/4	1 3/4	1 3/4	2 3/4
D - 4	5	6	5
E - 3 5/16	4 5/16	5 5/16	4 5/16
F - *	*	*	*
A - 4 3/4	4 3/4	5 3/4	6 3/4
B - 2 3/4	3 3/4	3 3/4	3 3/4
D - 6	6	7	8
E - 5 3/8	5 3/8	6 3/8	7 3/8
F - *	2 1/4	2 1/4	2 1/4
A - 6 3/4	6 3/4	8 3/4	10 3/4
B - 4 3/4	5 3/4	5 3/4	5 3/4
D - 8	8	10	12
E - 7 3/8	7 5/16	9 5/16	11 5/16
F - 3 1/4	4 1/4	4 1/4	4 1/4
A - 10 3/4	10 3/4		
B - 6 3/4	7 3/4		
D - 12	12		
E - 11 5/16	11 5/16		
F - 5 1/4	6 1/4		

*2-HOLE BRACKET


TYPE: LJ

PAPER-MYLAR*

HIGH VOLTAGE CAPACITORS



NOTE: THERE WILL BE SIZE VARIATIONS FROM THOSE SHOWN FOR SOME STYLES.

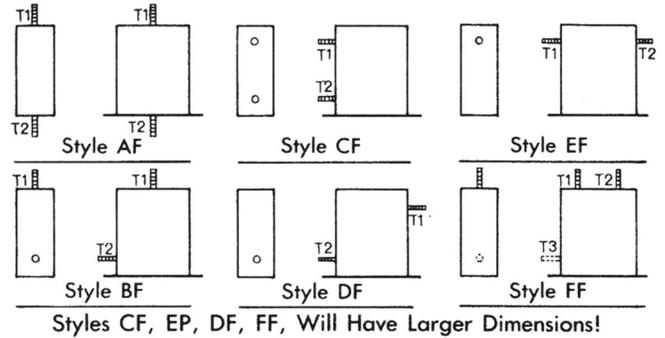

30 KVDCW					
PART NUMBER	CAP. MFD.	A	B	C	D
LJ300-103	.01	2 3/4	1 3/4	6	4
LJ300-203	.02	3 3/4	1 3/4	6	5
LJ300-303	.03	4 3/4	1 3/4	6	6
LJ300-503	.05	3 3/4	2 3/4	6 1/2	5
LJ300-603	.06	4 3/4	2 3/4	6 5/8	6
LJ300-104	.10	5 3/4	3 3/4	6	6
LJ300-124	.12	5 3/4	3 3/4	6	7
LJ300-154	.15	6 3/4	3 3/4	6	8
LJ300-204	.20	6 3/4	4 3/4	6	8
LJ300-254	.25	6 3/4	5 3/4	6 1/4	8
LJ300-304	.30	6 3/4	5 3/4	6	8

40 KVDCW					
PART NUMBER	CAP. MFD.	A	B	C	D
LJ400-103	.01	3 3/4	1 3/4	7	5
LJ400-203	.02	4 3/4	1 3/4	7	6
LJ400-303	.03	3 3/4	2 3/4	7	5
LJ400-503	.05	4 3/4	2 3/4	7 1/2	6
LJ400-603	.06	4 3/4	3 3/4	7	6
LJ400-104	.10	5 3/4	3 3/4	7	7
LJ400-124	.12	6 3/4	3 3/4	7	8
LJ400-154	.15	6 3/4	4 3/4	7	8
LJ400-204	.20	6 3/4	4 3/4	7	8
LJ400-254	.25	8 3/4	5 3/4	7 1/4	10
LJ400-304	.30	8 3/4	5 3/4	5 1/4	10

50 KVDCW					
PART NUMBER	CAP. MFD.	A	B	C	D
LJ500-502	.005	2 3/4	1 3/4	8	4
LJ500-103	.01	3 3/4	1 3/4	8	5
LJ500-203	.02	4 3/4	1 3/4	8	6
LJ500-303	.03	3 3/4	2 3/4	9	5
LJ500-503	.05	4 3/4	2 3/4	10 1/4	6
LJ500-603	.06	4 3/4	3 3/4	8	6
LJ500-104	.10	6 3/4	3 3/4	8 1/4	8
LJ500-124	.12	6 3/4	4 3/4	9	8
LJ500-154	.15	6 3/4	4 3/4	9	8
LJ500-204	.20	8 3/4	5 3/4	9	10
LJ500-254	.25	8 3/4	5 3/4	9	10
LJ500-304	.30	10 3/4	5 3/4	9	12

60 KVDCW					
PART NUMBER	CAP. MFD.	A	B	C	D
LJ600-502	.005	2 3/4	1 3/4	9	4
LJ600-103	.01	3 3/4	1 3/4	9	5
LJ600-203	.02	3 3/4	2 3/4	9	5
LJ600-503	.05	4 3/4	3 3/4	10	6
LJ600-603	.06	5 3/4	3 3/4	9	7
LJ600-104	.10	6 3/4	4 3/4	9	8
LJ600-124	.12	6 3/4	4 3/4	10	8
LJ600-154	.15	6 3/4	5 3/4	10	8
LJ600-204	.20	8 3/4	5 3/4	10	10
LJ600-154	.25	10 3/4	5 3/4	10	12
LJ600-304	.30	10 3/4	4 3/4	11 1/2	12

80 KVDCW					
PART NUMBER	CAP. MFD.	A	B	C	D
LJ800-502	.005	3 3/4	1 3/4	11	5
LJ800-103	.01	4 3/4	1 3/4	11	6
LJ800-203	.02	4 3/4	2 3/4	11	5
LJ800-303	.03	4 3/4	3 3/4	11	6
LJ800-503	.05	5 3/4	3 3/4	12 3/4	7
LJ800-603	.06	6 3/4	3 3/4	12	8
LJ800-104	.10	6 3/4	5 3/4	11	8
LJ800-124	.12	8 3/4	5 3/4	11	10
LJ800-154	.15	8 3/4	5 3/4	12	10
LJ800-204	.20	10 3/4	5 3/4	12 1/2	12
LJ800-254	.25	10 3/4	7 3/4	12	12

100 KVDCW					
PART NUMBER	CAP. MFD.	A	B	C	D
LJ1000-202	.002	2 3/4	1 3/4	14	4
LJ1000-302	.003	2 3/4	1 3/4	16	4
LJ1000-502	.005	3 3/4	1 3/4	13 1/4	5
LJ1000-103	.01	4 3/4	1 3/4	15	6
LJ1000-203	.02	4 3/4	2 3/4	15	6
LJ1000-303	.03	4 3/4	3 3/4	15	6
LJ1000-503	.05	6 3/4	3 3/4	15	8
LJ1000-603	.06	6 3/4	4 3/4	14	8
LJ1000-104	.10	8 3/4	5 3/4	14	10
LJ1000-124	.12	8 3/4	5 3/4	15	10
LJ1000-154	.15	10 3/4	5 3/4	15	12
LJ1000-204	.20	10 3/4	7 3/4	15 1/2	12
LJ1000-254	.25	10 3/4	7 3/4	18	12

120 KVDCW					
PART NUMBER	CAP. MFD.	A	B	C	D
LJ1200-202	.002	2 3/4	1 3/4	18	4
LJ1200-302	.003	2 3/4	1 3/4	18	4
LJ1200-502	.005	3 3/4	1 3/4	18	5
LJ1200-602	.006	3 3/4	1 3/4	18 1/2	5
LJ1200-103	.01	3 3/4	2 3/4	18	5
LJ1200-203	.02	4 3/4	2 3/4	18	6
LJ1200-303	.03	5 3/4	3 3/4	18	7
LJ1200-503	.05	6 3/4	3 3/4	19 1/2	8
LJ1200-603	.06	6 3/4	4 3/4	18 1/2	8
LJ1200-104	.10	8 3/4	5 3/4	21 3/4	10
LJ1200-124	.12	10 3/4	5 3/4	18	12
LJ1200-154	.15	10 3/4	6 3/4	18	12
LJ1200-204	.20	10 3/4	7 3/4	21	12

150 KVDCW					
PART NUMBER	CAP. MFD.	A	B	C	D
LJ1500-202	.002	2 3/4	1 3/4	21	4
LJ1500-502	.005	3 3/4	1 3/4	22	5
LJ1500-103	.01	3 3/4	2 3/4	25 1/2	5
LJ1500-203	.02	4 3/4	3 3/4	21	6
LJ1500-303	.03	6 3/4	3 3/4	21	8
LJ1500-503	.05	6 3/4	5 3/4	21	8
LJ1500-104	.10	10 3/4	5 3/4	21	12
LJ1500-124	.12	10 3/4	6 3/4	22	12
LJ1500-154	.15	10 3/4	7 3/4	23	12

200 KVDCW					
PART NUMBER	CAP. MFD.	A	B	C	D
LJ2000-102	.001	2 3/4	1 3/4	26	4
LJ2000-202	.002	3 3/4	1 3/4	26	5
LJ2000-302	.003	3 3/4	1 3/4	26	5
LJ2000-502	.005	4 3/4	1 3/4	26	6
LJ2000-103	.01	4 3/4	2 3/4	27	6
LJ2000-203	.02	5 3/4	3 3/4	27	7
LJ2000-303	.03	6 3/4	4 3/4	26	8
LJ2000-503	.05	8 3/4	5 3/4	26	10
LJ2000-603	.06	8 3/4	5 3/4	27 1/2	10
LJ2000-104	.10	10 3/4	7 3/4	27	12

*DUPONT POLYESTER FILM

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



TYPE: OT

PLASTIC FILM DIELECTRIC HIGH VOLTAGE FILTER



TYPE 'OT' capacitors are designed for long life at high voltage in the medium temperature range. Type 'OT' capacitors are the smallest and most economical capacitors available for high voltage DC filtering.

CORONA CAP is provided for the protection of the capacitor, permitting safe operation in close quarters. The corona cap is aluminum. Additional caps are available at a nominal charge.

MOUNTING must be mounted vertically, corona cap at top.

IMPREGNANT is a highly purified mineral oil with an aging inhibitor.

CASE is hermetically sealed and designed for operation under oil. Many of the lower voltage units may be operated in air. Many capacitance values at stated voltages are available in two physical sizes, providing the design engineer flexibility in placement of parts and circuit wiring.

TERMINALS and mounting stud are axial 3/8-16x1" long.

CAPACITANCE TOLERANCE normally supplied is $\pm 10\%$.

TEST VOLTAGE: 150% rated voltage under oil for one minute at room temperature (vertically mounted).

TEMPERATURE RANGE: Type 'OT' capacitors will give long life in the temperature range of -40°C to 65°C with the rated voltage applied.





TEMPERATURE COEFFICIENT: Capacitance change over the temperature range is indicated by the limiting curves in the graph T vs. C.

LIFE: Type 'OT' capacitor, are designed for continuous operation at 65°C for 10,000 hours.

POWER FACTOR is variable and is a function of temperature and frequency. Refer to graph, "Power Factor vs. Temperature".

RIPPLE: The peak ripple voltage plus the DC voltage should not exceed the name-plate voltage. Acceptable peak to peak ripple voltage in percent of nameplate voltage follows:

FREQUENCY Hz	PEAK TO PEAK RIPPLE VOLTAGE %
60	25
120	20
400	5
1000	3

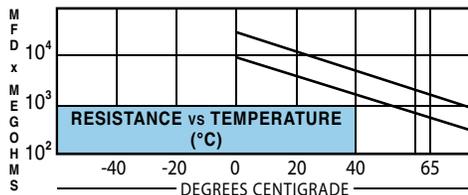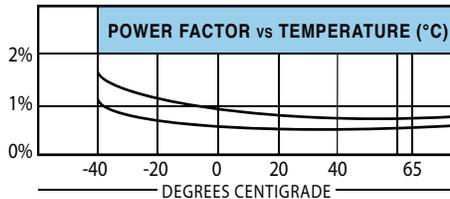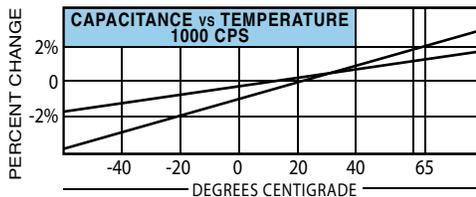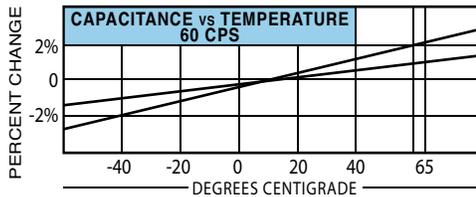

DIELECTRIC RESISTANCE is given in the R vs. T graph. Measurement can be made with nameplate voltage. Capacitance values under 1 mfd. need not exceed two times the graph value per mfd. at any temperature.

HOW TO ORDER: Check listing for capacitance and voltage. Note that more than one container size is often available. Standard capacitance tolerance is $\pm 10\%$.

TYPE: LK

MYLAR* PAPER FILTER CAPACITORS

TYPE 'LK' CAPACITORS offer unusually good electrical characteristics, coupled with very small size. They are designed for twice the life of MIL-C-25D capacitors (see life characteristics) and will meet or exceed the requirements of characteristic 'E'. **These are not QPL listed.**

TYPE 'LK' CAPACITORS are specifically designed for filter, bypass and coupling applications in the low audio frequency range. The CP70 style container and internal construction permit operation in any position. Glazed steatite bushings are used, and in the voltage ranges of 2000 and greater, steatite is the electrical insulation in the terminal assembly. The threaded stud terminal is supplied with nut and solder lug. The whole assembly is hermetically sealed.

APPLICATIONS: While Type 'LK' capacitors are designed primarily for filter, bypass and coupling applications in the low audio frequency range, they may be used advantageously in the following applications.


- | | |
|---------------------------|---------------------------|
| Audio coupling | Tuned filters |
| Pulse forming networks | Energy storage |
| Oscillator circuits | Power factor correction |
| Arc and spark suppression | Integrating circuits |
| RF bypass | Low and high pass filters |

Consult **Plastic Capacitors, Inc.**, Engineering staff for your specific application.

HOW TO ORDER: Check listing for capacitance and voltage. Note that more than one container size is often available. Standard capacitance tolerance is $\pm 10\%$; for closer tolerances use basic part number assigned and add a dash (-) plus the tolerance required i.e., 5 or 2 for 5% or 2%.

TEMPERATURE RANGE is -55°C to 105°C . Rated nameplate voltage is from -55°C to 85°C .


TEMPERATURE COEFFICIENT: Capacitance change over the temperature range is indicated by the limiting curves in the graph T vs. C.

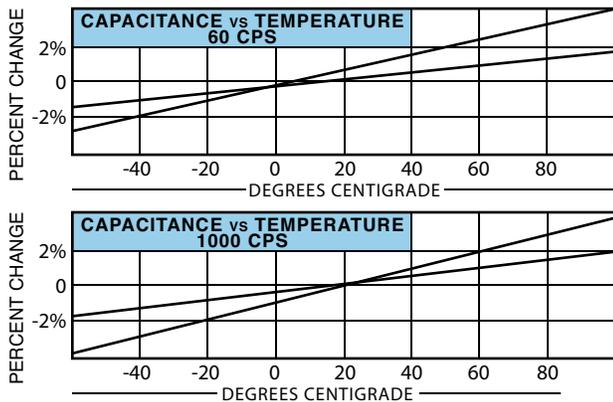

CAPACITANCE TOLERANCE: Standard is 10%. Also available are tolerances of 5% and 2%. Nominal value of capacitance of 1 mfd. or less is measured with 1000 CPS applied to the bridge and 60 CPS for nominal values greater than 1 mfd.

LIFE CHARACTERISTICS: Definition of Groups I, II and III are included in life test Paragraph, Page A10.


Group I capacitors are rated for 2500 hours life at 85°C and 17,000 hours life at 50°C . For 10,000 hours life at 85°C derate to 75% nameplate voltage rating. For 2500 hours life at 105°C derate to 85% nameplate voltage rating.

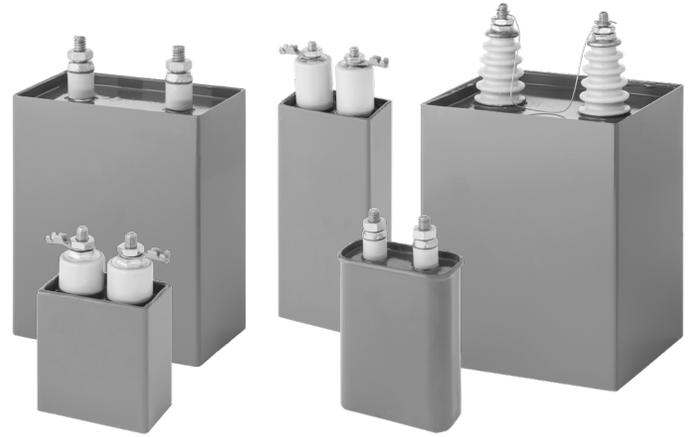


Group II capacitors are rated for 1250 hours life at 85°C , 8500 hours life at 50°C . For 2500 hours life at 85°C derate to 85% nameplate voltage rating. For 10,000 hours life at 85°C derate to 65% nameplate voltage rating. For 2500 hours life at 105°C derate to 70% nameplate voltage rating. (See **life test** for capacitor groupings.)

Group III capacitors are rated for 500 hours life at 85°C , and 3500 hours life at 50°C . For 2500 hours life at 85°C derate to 70% nameplate voltage rating. For 10,000 hours life at 85°C derate to 55% nameplate voltage rating. For 10,000 hours life at 50°C derate to 80% nameplate voltage rating.

DIELECTRIC RESISTANCE (parallel resistance) is indicated by the curve R vs T. This curve expresses limits with nameplate voltage applied and 2 minute electrification time. Limitations 10^4 megohms x mfd. or 10^4 megohms whichever is less at room temperature.

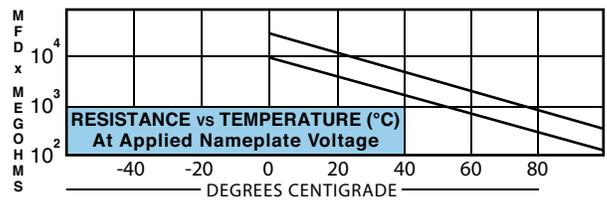

POWER FACTOR is variable and is a function of temperature and frequency. Refer to graph, "Power Factor vs. Temperature".

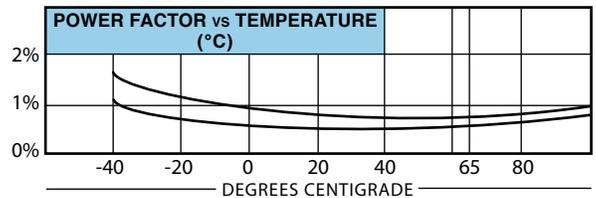

RIPPLE: The peak ripple voltage plus the DC voltage should not exceed the nameplate voltage. Acceptable peak to peak ripple voltage in percent of nameplate voltage follows:

FREQUENCY Hz	PEAK TO PEAK RIPPLE VOLTAGE %
60	25
120	20
400	5
1000	3

*DUPONT POLYESTER FILM

TYPE: LK

MYLAR* PAPER FILTER CAPACITORS



PHYSICAL DESCRIPTION

TYPE 'LK' capacitors are oil-impregnated, oil-filled and are hermetically sealed.

CASE is terne-plate or hot-tinned steel.

FINISH consists of a primer coat and finish coat of synthetic enamel, grey in color.

TERMINALS are mounted on glazed steatite bushings. Neoprene gaskets or solder seals are used to effect the hermetic seal and a nut and solder lug are provided as part of the terminal assembly. Steatite is used as the insulation between the terminal post and the case for all voltages greater than 1000. All terminal bushings are oil-filled.

DIELECTRIC is a combination of polyester resin film and the finest grade Kraft capacitor tissue.

IMPREGNANT is a highly refined, purified and inhibited mineral oil with a flash point greater than 145° (when measured per method 110.3.4 of Specification VV-L-791.

BRACKETS: Footed brackets are supplied at no charge. A nominal charge is made for spade bolt type brackets. These may be ordered only with capacitors.

MOUNTING POSITION: All Type 'LK' capacitors will operate satisfactorily mounted in any position.

TEST VOLTAGE: Terminal to terminal for capacitors rated through 20 KV, one minute at room temperature with 200% rated voltage applied. For rated voltages greater than 20 KV, 150% rated voltage for two minutes at room temperature. Terminal to case, same as above, but plus 1000 volts. Test voltage shall be applied and discharged through a resistance of at least one ohm per rated volt but need not be more than 5000 ohms.

FLASHOVER: The capacitor terminals will withstand 125% rated nameplate voltage without flash-over at a pressure of 3.4 inches of mercury, equivalent to 50,000 feet altitude.

This applies only to nameplate voltages of 5000 or less. Rated nameplate voltage of 6000 or more will withstand 125% rated nameplate voltage at a pressure of 20 inches of mercury, equivalent to 10,000 feet altitude.

ENVIRONMENTAL TESTING

LIFE TEST will be conducted at 85°C for 500 hours. One failure of 24 so tested will be permitted. Voltage applied will be according to the following table:

- I 0-50 watt seconds—less than 12 mfd., 140% rated voltage
- II 12 mfd. or more—120% rated voltage
- I 51-200 watt seconds—4 mfd. or less, 140% rated voltage
- II 5 mfd. or more, 120% voltage
- II 201 or over watt seconds—2 mfd. or less, 120% rated voltage
- III Over 2 mfd., 100% rated voltage

TEMPERATURE and IMMERSION cycling shall be conducted per requirements of MIL-C-25D.

MOISTURE RESISTANCE shall be conducted per requirements of MIL-C-25D.

CORROSION or SALT SPRAY test shall be conducted according to the 100 hour requirements of MIL-QQ-M-151A.

VIBRATION and SHOCK tests may be performed per MIL-C-25D or per MIL-E-5272 (any method).

HOW TO ORDER: Check listing for capacitance and voltage. Note that more than one container size is often available. Use basic part number assigned and add a dash (—) plus the capacitance tolerance, 5 or 2 for 5% or 2% tolerance as required. Standard tolerance (10%) not shown on capacitors.

600 VDCW

PART NUMBER	CAP. MFD.	A	B	C	D	E
LK6-104	.1	1 3/4	1	2 1/8	13/16	3/4
LK6-254	.25	1 3/4	1	2 1/8		
LK6-504	.5	1 3/4	1	2 1/8		
LK6-105	1.0	1 3/4	1	2 1/8		
LK6-205	2.0	1 3/4	1	3 1/4		
LK6-405	4.0	1 3/4	1	5 1/4		
LK6-405Y	4.0	2 1/2	1 3/16	3 1/4		
LK6-605	6.0	2 1/2	1 3/16	4 1/2		
LK6-805	8.0	2 1/2	1 3/16	5 1/2		
LK6-805Y	8.0	3 3/4	1 1/4	4		
LK6-106	10.0	3 3/4	1 1/4	4 1/2	2	3 3/4
LK6-106Y	10.0	3 3/4	1 3/4	3 1/2		
LK6-126	12.0	3 3/4	1 1/4	5		
LK6-126Y	12.0	3 3/4	1 3/4	3 3/4		
LK6-156	15.0	3 3/4	1 1/4	6		
LK6-156Y	15.0	3 3/4	1 3/4	4 1/2		
LK6-156Z	15.0	3 3/4	2 1/4	3 3/4		
LK6-206	20.0	3 3/4	1 3/4	5 1/2		
LK6-206Y	20.0	3 3/4	2 1/4	4 1/2		
LK6-256	25.0	3 3/4	2 1/4	5 3/4		
LK6-256Y	25.0	3 3/4	3 3/16	4		
LK6-306	30.0	3 3/4	2 1/4	6 1/4		
LK6-306Y	30.0	3 3/4	3 3/16	4 3/4		
LK6-306Z	30.0	4 9/16	3 3/4	3 1/2		

1000 VDCW

PART NUMBER	CAP. MFD.	A	B	C	D	E
LK10-104	.1	1 3/4	1	2 1/8	13/16	3/4
LK10-254	.25	1 3/4	1	2 1/8		
LK10-504	.5	1 3/4	1	2 1/8		
LK10-105	1.0	1 3/4	1	2 1/8		
LK10-205	2.0	1 3/4	1	3 1/2		
LK10-405	4.0	1 3/4	1	5 3/4		

1000 VDCW (Cont'd)

PART NUMBER	CAP. MFD.	A	B	C	D	E
LK10-405Y	4.0	2 1/2	1 3/16	3 3/16	1 1/8	3 3/4
LK10-605	6.0	2 1/2	1 3/16	5	1 1/8	
LK10-605Y	6.0	3 3/4	1 1/4	3 1/2	2	
LK10-805	8.0	2 1/2	1 3/16	6 1/4	1 1/8	
LK10-805Y	8.0	3 3/4	1 1/4	4 1/4	2	
LK10-106	10.0	3 3/4	1 1/4	5		
LK10-106Y	10.0	3 3/4	1 3/4	3 3/4		
LK10-126	12.0	3 3/4	1 1/4	5 3/4		
LK10-126Y	12.0	3 3/4	1 3/4	4 1/4		
LK10-156	15.0	3 3/4	1 3/4	5 1/4		
LK10-156Y	15.0	3 3/4	2 1/4	4		
LK10-206	20.0	3 3/4	1 3/4	6 1/4		
LK10-206Y	20.0	3 3/4	2 1/4	5 1/4		
LK10-206Z	20.0	3 3/4	3 3/16	4		
LK10-256	25.0	3 3/4	2 1/4	6 1/4		
LK10-256Y	25.0	3 3/4	3 3/16	4 3/4		
LK10-306	30.0	3 3/4	3 3/16	5 1/4		
LK10-306Y	30.0	4 9/16	3 3/4	4		

1500 VDCW

PART NUMBER	CAP. MFD.	A	B	C	D	E
LK15-205Y	2.0	1 3/4	1	4 1/2	13/16	1 1/8
LK15-405Y	4.0	2 1/2	1 3/16	4 3/4	13/16	
LK15-605Y	6.0	2 1/2	1 3/16	6 1/2	1 1/8	
LK15-805Y	8.0	2 1/2	1 3/16	8 1/4	1 1/8	
LK15-106Y	10.0	3 3/4	1 1/4	6 3/4	1 1/8	
LK15-126Y	12.0	3 3/4	1 1/4	7 1/2	2	
LK15-156Y	15.0	3 3/4	1 3/4	6 3/4		
LK15-206Y	20.0	3 3/4	1 3/4	8 1/2		
LK15-256Y	25.0	3 3/4	2 1/4	8 3/4		
LK15-306Y	30.0	3 3/4	3 3/16	7 1/4		
LK15-406Y	40.0	4 9/16	3 3/4	6 3/4		
LK15-506Y	50.0	4 9/16	3 3/4	8 1/4		

*DUPONT POLYESTER FILM


1100 S. Plumer Avenue
Tucson, AZ 85719
www.plasticcapacitors.com

tel: 520.573.0221
fax: 520.573.0520



TYPE: LK

MYLAR* PAPER FILTER CAPACITORS

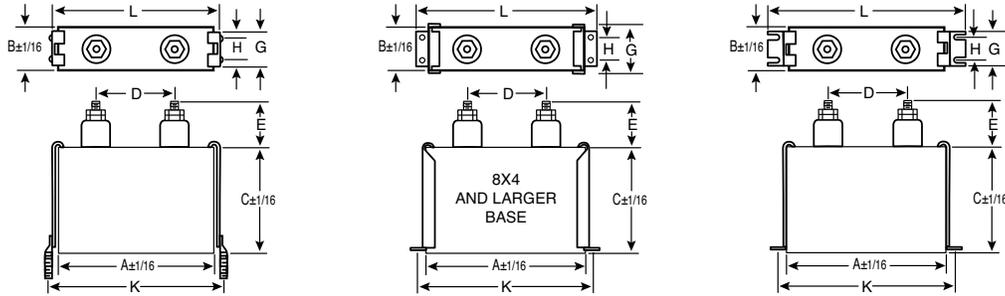

*DUPONT POLYESTER FILM

2000 VDCW						
PART NUMBER	CAP. MFD.	A	B	C	D	E
LK20-104	.1	1 3/4	1	2 1/8	13/16	1 1/8
LK20-254	.25	1 3/4	1	2 1/8		
LK20-504	.5	1 3/4	1	2 1/8		
LK20-105	1.0	1 3/4	1	3 1/4		
LK20-205	2.0	2 1/2	1 3/16	3 1/2		
LK20-205Y	2.0	1 3/4	1	5		
LK20-405	4.0	2 1/2	1 3/16	5 1/2		
LK20-405Y	4.0	3 3/4	1 1/4	3 3/4		
LK20-605	6.0	3 3/4	1 1/4	5		
LK20-605Y	6.0	3 3/4	1 3/4	3 3/4		
LK20-805	8.0	3 3/4	1 1/4	6 1/4		
LK20-805Y	8.0	3 3/4	1 3/4	4 1/2		
LK20-106	10.0	3 3/4	1 3/4	5 1/4		
LK20-106Y	10.0	3 3/4	2 1/4	4 1/2		
LK20-126	12.0	3 3/4	1 3/4	6 1/4		
LK20-126Y	12.0	3 3/4	2 1/4	5		
LK20-126Z	12.0	3 3/4	3 3/16	4		
LK20-156	15.0	3 3/4	2 1/4	6		
LK20-156Y	15.0	3 3/4	3 3/16	5		
LK20-156Z	15.0	4 9/16	3 3/4	3 3/4		
LK20-206	20.0	3 3/4	3 3/16	6		
LK20-206Y	20.0	4 9/16	3 3/4	4 1/4		
LK20-256	25.0	3 3/4	3 3/16	6 3/4		
LK20-306	30.0	4 9/16	3 3/4	5 3/4		
LK20-406	40.0	4 9/16	3 3/4	7 3/4		
LK20-506	50.0	4 9/16	3 3/4	9 1/4		
3000 VDCW						
PART NUMBER	CAP. MFD.	A	B	C	D	E
LKJ0-104	.1	1 3/4	1	2 1/8	13/16	1 1/8
LKJ0-254	.25	1 3/4	1	2 1/2		
LKJ0-504	.5	1 3/4	1	3 1/4		
LK30-105	1.0	1 3/4	1	5 1/4		
LK30-105Y	1.0	2 1/2	1 3/16	3 1/2		
LK30-205	2	2 1/2	1 3/16	5 1/2		
LK30-205Y	2	3 3/4	1 1/4	3 3/4		
LK30-405	4	3 3/4	1 1/4	6 1/4		
LK30-405Y	4	3 3/4	1 3/4	4 3/4		
LK30-405Z	4	3 3/4	2 1/4	4		
LK30-605	6	3 3/4	1 3/4	6 1/4		
LK30-605Y	6	3 3/4	2 1/4	5 1/4		
LK30-605Z	6	3 3/4	3 3/16	4		
LK30-805	8	3 3/4	2 1/4	6 1/2		
LK30-805Y	8	3 3/4	3 3/16	5		
LK30-805Z	8	4 9/16	3 3/4	3 3/4		
LK30-106	10	3 3/4	3 3/16	5 3/4		
LK30-106Y	10	4 9/16	3 3/4	4 1/2		
LK30-126	12	3 3/4	3 3/16	6 3/4		
LK30-126Y	12	4 9/16	3 3/4	5		
LK30-156	15	4 9/16	3 3/4	6		
LK30-206Y	20	4 9/16	3 3/4	7		
LK30-256Y	25	4 9/16	3 3/4	10		
LK30-306Z	30	4 9/16	3 3/4	11 1/2		
LK30-406	40	3 3/8	5 5/8	9		
LK30-506Y	50	3 3/8	5 5/8	8		
4000 VDCW						
PART NUMBER	CAP. MFD.	A	B	C	D	E
LK40-503	.05	1 3/4	1	2 1/8	13/16	1 1/8
LK40-104	.1	1 3/4	1	2 1/8		
LK40-254	.25	1 3/4	1	2 3/4		
LK40-504	.5	1 3/4	1	4		

CASE BASE DIMENSIONS A	FOOTED K BRACKET B	SPADE BRACKET	L MAX	G MAX	H	J
1 3/4	1	2 1/2	2 1/16	3 1/16	*	.213
2 1/2	1 13/16	3 1/4	2 3/4	3 13/16	*	.213
3 3/4	1 1/4	4 7/16	4	5	*	.213
3 3/4	1 3/4	4 7/16	4	5	1 1/2	.213
3 3/4	2 1/4	4 11/16	4	5 1/4	2	.213
3 3/4	3 3/16	4 11/16	4	5 1/4	2 7/8	.213
4 9/16	3 3/4	4 11/16	4	5 1/4	4 5/16	.213
6	4 11/16	5 11/16	Not Available	6 1/4	4 13/16	.295
7 3/8	5 5/8	6 1/2	Not Available	7 1/8	6 1/16	.295
8	4	10 1/8	Not Available	11 1/4	4 9/32	.437
13 1/2	4 1/8	15 5/8	Not Available	16 3/4	4 13/32	.437
13 1/2	5 1/8	15 5/8	Not Available	16 3/4	5 13/32	.437

*Single slot or lug centered - J Hole or slot diameter on footed brackets. Brackets for base sizes 4 9/16" x 3 3/4", 6x4 11/16", 7 3/8" x 5 5/8" are mounted on the side parallel to the centerline down through the terminals.

4000 VDCW (Continued)						
PART NUMBER	CAP. MFD.	A	B	C	D	E
LK40-105	1.0	2 1/2	1 3/16	4	1 1/8	1 1/8
LK40-205	2.0	2 1/2	1 3/16	6 3/4		
LK40-205Y	2.0	3 3/4	1 3/4	3 3/4		
LK40-405	4.0	3 3/4	1 3/4	6		
LK40-405Y	4.0	3 3/4	2 1/4	4 3/4		
LK40-605	6.0	3 3/4	2 1/4	6 1/2		
LK40-605Y	6.0	3 3/4	3 3/16	5		
LK40-605Z	6.0	4 9/16	3 3/4	3 3/4		
LK40-805	8.0	3 3/4	3 3/16	6		
LK40-805Y	8.0	4 9/16	3 3/4	4 3/4		
LK40-106	10.0	4 9/16	3 3/4	5 1/2		
LK40-126	12.0	4 9/16	3 3/4	6 1/2		
LK40-156	15.0	4 9/16	3 3/4	8 1/2		
LK40-206Z	20.0	4 9/16	3 3/4	9		
LK40-256Y	25.0	4 9/16	3 3/4	11		
LK40-306Y	30.0	6	4 11/16	9 1/4		
LK40-406	40.0	7 3/8	5 5/8	8 1/2		
LK40-506	50.0	7 3/8	5 5/8	11		

5000 VDCW						
PART NUMBER	CAP. MFD.	A	B	C	D	E
LK50-104	0.1	1 3/4	1	2 1/8	13/16	1 1/8
LK50-254	0.25	1 3/4	1	3		
LK50-504	0.5	1 3/4	1	4 3/4		
LK50-504Y	0.5	2 1/2	1 3/16	3 1/4		
LK50-105	1.0	2 1/2	1 3/16	5		
LK50-105Y	1.0	3 3/4	1 1/4	3 3/4		
LK50-205	2.0	3 3/4	1 1/4	6		
LK50-205Y	2.0	3 3/4	1 3/4	4 1/2		
LK50-205Z	2.0	3 3/4	2 1/4	3 3/4		
LK50-405	4.0	3 3/4	2 1/4	6 1/4		
LK50-405Y	4.0	3 3/4	3 3/16	4 3/4		
LK50-405Z	4.0	4 9/16	3 3/4	3 3/4		
LK50-605	6.0	3 3/4	3 3/16	6 1/2		
LK50-605Y	6.0	4 9/16	3 3/4	4 3/4		
LK50-805	8.0	4 9/16	3 3/4	6 1/4		
LK50-106Y	10.0	4 9/16	3 3/4	7 1/2		
LK50-126Y	12.0	4 9/16	3 3/4	8		
LK50-156Y	15.0	4 9/16	3 3/4	9 1/4		
LK50-206Y	20.0	7 3/8	5 5/8	5 3/4		
LK50-206Z	20.0	6	4 11/16	8 1/2		
LK50-256Y	25.0	6	4 11/16	10		
LK50-306Y	30.0	7 3/8	5 5/8	8		
LK50-406Y	40.0	7 3/8	5 5/8	11		

TYPE: LK

MYLAR* PAPER FILTER CAPACITORS



6000 VDCW							15 KVDCW						
PART NUMBER	CAP. MFD.	A	B	C	D	E	PART NUMBER	CAP. MFD.	A	B	C	D	E
LK60-104	.1	3 3/4	1 1/4	2 1/4			LK150-203	.1	3 3/4	1 3/4	3 1/4		
LK60-254	.25	3 3/4	1 1/4	2 1/2			LK150-503	.05	3 3/4	1 3/4	3 1/2		
LK60-504	.5	3 3/4	1 1/4	3 3/4			LK150-104	.1	3 3/4	1 3/4	3 3/4		
LK60-105	1.0	3 3/4	1 1/4	5 1/2			LK150-254	.25	3 3/4	1 3/4	7		
LK60-105Y	1.0	3 3/4	1 3/4	4 1/2			LK150-254Y	.25	3 3/4	2 1/4	5 1/4	2	
LK60-205	2.0	3 3/4	2 1/4	6 1/4	2		LK150-504	.5	3 3/4	3 3/16	6 1/2		2 3/4
LK60-205Y	2.0	3 3/4	3 3/16	4 3/4		1 7/16	LK150-504Y	.5	4 9/16	3 3/4	5		
LK60-405	4.0	4 9/16	3 3/4	6			LK150-105	1.0	4 9/16	3 3/4	8 1/2		
LK60-605	6.0	4 9/16	3 3/4	8 1/4			LK150-205Y	2.0	6	4 11/16	9 1/4	3	
LK60-805	8.0	4 9/16	3 3/4	10 1/4			LK150-405Y	4.0	7 3/8	5 5/8	12 1/8	3	
LK60-106Y	10.	6	4 11/16	8 3/4	3		LK150-505	5.0	13 1/2	4 1/8	11 7/8	6 3/4	
LK60-126Y	12.	6	4 11/16	9 3/4	3		LK150-605	6.0	13 1/2	5 1/8	11 7/8	6 3/4	
LK60-156Z	15.	7 3/8	5 5/8	8 3/4	3		LK150-805	8.0	13 1/2	6 1/8	11 7/8	6 3/4	
LK60-206Y	20.	7 3/8	5 5/8	10 1/4	3								
LK60-306Y	30.	13 1/2	5 1/8	11 7/8	6 3/4	2 1/8							
LK60-406	40.	13 1/2	5 1/8	12 7/8	6 3/4	2 1/8							
LK60-506	50.	13 1/2	7 1/8	11 7/8	6 3/4	2 1/8							
8000 VDCW							20 KVDCW						
LK80-104Y	.1	2 1/2	1 3/16	3	1 1/8		LK200-203	.01	3 3/4	2 1/4	3 1/4		
LK80-104	.1	3 3/4	1 1/4	2 1/2	2		LK200-203	.20	3 3/4	2 1/4	3 1/4		
LK80-254Y	.25	2 1/2	1 3/16	5 1/4	1 1/8		LK200-503	.05	3 3/4	2 1/4	3 3/4		
LK80-254	.25	3 3/4	1 1/4	3 3/4			LK200-104	.1	3 3/4	2 1/4	4 3/4	2	
LK80-504	.5	3 3/4	1 1/4	5 3/4			LK200-254	.25	3 3/4	3 3/16	6		
LK80-504Y	.5	3 3/4	1 3/4	4 1/4			LK200-254Y	.25	4 9/16	3 3/4	4 3/4		
LK80-105	1.0	3 3/4	1 3/4	7			LK200-504	.5	4 9/16	3 3/4	7 1/2		
LK80-105Y	1.0	3 3/4	2 1/4	5 3/4	2		LK200-105	1.0	8	4	9 1/4	4 1/2	2 3/4
LK80-105Z	1.0	3 3/4	3 3/16	4 1/2			LK200-105Y	1.0	4 9/16	3 3/4	12	2	
LK80-205	2.0	3 3/4	3 3/16	7		2 1/8	LK200-205	2.0	13 1/2	4 1/8	9 1/4	6 3/4	
LK80-205Y	2.0	4 9/16	3 3/4	5 1/4			LK200-205Y	2.0	7 3/8	5 5/8	10	3	
LK80-405Y	4.0	4 9/16	3 3/4	8 1/2			LK200-405	4.0	13 1/2	5 1/8	11 7/8	6 3/4	
LK80-605Y	6.0	6	4 11/16	8 1/4	3		LK200-505	5.0	13 1/2	6 1/8	11 7/8	6 3/4	
LK80-805Y	8.0	6	4 11/16	10	3		LK200-605	6.0	13 1/2	7 1/8	11 7/8	6 3/4	
LK80-106Y	10.0	7 3/8	5 5/8	9	3								
LK80-126Y	12.0	7 3/8	5 5/8	10 1/2	3								
LK80-156Y	15.0	13 1/2	4 1/8	11	6 3/4								
LK80-206Y	20.0	13 1/2	5 1/8	11 7/8	6 3/4								
LK80-256	25.0	13 1/2	6 1/8	11 7/8	6 3/4								
LK80-306	30.0	13 1/2	7 1/8	11 7/8	6 3/4								
10 KVDCW							25 KVDCW						
LK100-104	.1	3 3/4	1 3/4	3 1/4			LK250-203	.01	3 3/4	3 3/16	3 1/2		
LK100-254	.25	3 3/4	1 3/4	3 3/4			LK250-203	.02	3 3/4	3 3/16	3 1/2		
LK100-254Y	.25	3 3/4	2 1/4	3 1/4			LK250-503	.05	3 3/4	3 3/16	4		
LK100-504	.5	3 3/4	1 3/4	5 3/4			LK250-104	.1	3 3/4	3 3/16	4 3/4	*	
LK100-504Y	.5	3 3/4	2 1/4	4 1/2			LK250-254	.25	4 9/16	3 3/4	6 1/2		3 7/8 ±1/2
LK100-504Z	.5	3 3/4	3 3/16	3 3/4	2		LK250-504	.5	4 9/16	3 3/4	11 1/2		
LK100-105	1.0	3 3/4	2 1/4	7 1/4			LK250-504Y	.5	8	4	9 1/4	4 1/2	
LK100-105Y	1.0	3 3/4	3 3/16	5 1/4			LK250-504Z	.5	6	4 11/16	6 1/4	3	
LK100-105Z	1.0	4 9/16	3 3/4	4 1/2		2 1/8	LK250-105	1.0	13 1/2	4 1/8	9 1/4	6 3/4	
LK100-205	2.0	4 9/16	3 3/4	6 3/4			LK250-205	2.0	13 1/2	5 1/8	13 3/4	6 3/4	
LK100-405Y	4.0	4 9/16	3 3/4	11									
LK100-505	5.0	7 3/8	5 5/8	8 3/4	3								
LK100-605Y	6.0	7 3/8	5 5/8	10 1/2	3								
LK100-805Y	8.0	7 3/8	5 5/8	9 1/4	3								
LK100-106Y	10.0	7 3/8	5 5/8	11	3								
LK100-126Y	12.0	13 1/2	4 1/8	11	6 3/4								
LK100-156Y	15.0	13 1/2	5 1/8	11 7/8	6 3/4								
LK100-206	20.0	13 1/2	6 1/8	11 7/8	6 3/4								
12.5 KVDCW							30 KVDCW						
LK125-503	.05	3 3/4	1 3/4	3			LK300-103	.01	3 3/4	3 3/16	4		
LK125-104	.1	3 3/4	1 3/4	3 5/8			LK300-204	.02	3 3/4	3 3/16	4		
LK125-254	.25	3 3/4	1 3/4	5 7/8			LK300-503	.05	3 3/4	3 3/16	5 1/2	*	
LK125-505	.5	3 3/4	3 3/16	5 5/8			LK300-104	.1	3 3/4	3 3/16	8 3/4		
LK125-504Y	.5	4 9/16	3 3/4	4 3/8	2		LK300-254Y	.25	4 9/16	3 3/4	8 3/4		3 7/8 ±1/8
LK125-105	1.0	4 9/16	3 3/4	6 5/8			LK300-254Z	.25	6	4 11/16	6	3	
LK125-205	2.0	4 9/16	3 3/4	11			LK300-504Y	.5	6	4 11/16	9 1/4	*	
LK125-205Z	2.0	6	4 11/16	7 3/4	3	2 3/4	LK300-504Z	.5	6	4 11/16	9 1/4	3	
LK125-405Y	4.0	7 3/8	5 5/8	9 1/2	3		LK300-105Y	1.0	13 1/2	4 1/8	11	6 3/4	
LK125-505	5.0	7 3/8	5 5/8	12 1/8	3		LK300-205	2.0	13 1/2	6 1/8	11 7/8	6 3/4	
LK125-606	6.0	13 1/2	4 1/8	11	6 3/4								
LK125-805Y	8.0	13 1/2	5 1/8	11 7/8	6 3/4								
LK125-106	10.0	13 1/2	5 1/8	13 3/4	6 3/4								
LK125-106Y	10.0	13 1/2	6 1/8	11 7/8	6 3/4								
50 KVDCW							40 KVDCW						
LK500-203	.02	4 9/16	3 3/4	7 1/2	*		LK400-502	.005	4 9/16	3 3/4	5		
LK500-503	.05	4 9/16	3 3/4	11	*		LK400-103	.01	4 9/16	3 3/4	5		
LK500-503Y	.05	8	4	7	4 1/2		LK400-203	.02	4 9/16	3 3/4	5	*	
LK500-104	.1	8	4	9 1/4	4 1/2		LK400-503	.05	4 9/16	3 3/4	5 1/2		3 7/8 ±1/8
LK500-104Y	.1	8	4	9 1/4	*		LK400-104	.1	4 9/16	3 3/4	10 3/4		
LK500-104Z	.1	6	4 11/16	6 1/2	*	3 5/8 ±1/8	LK400-254	.25	13 1/2	4 1/8	9 1/4	6 3/4	
LK500-254	.25	13 1/2	4 1/8	11	6 3/4		LK400-504	.5	13 1/2	5 1/8	11 7/8	6 3/4	
LK500-254Y	.25	13 1/2	4 1/8	11	*								
LK500-254Z	.25	7 3/8	5 5/8	11	*								
LK500-504	.5	13 1/2	5 1/8	13 3/4	6 3/4								
LK500-504Y	.5	13 1/2	5 1/8	13 3/4	*								

*DUPONT POLYESTER FILM

"D" Dimension Asterisk Indicates One Terminal and Ground Stud.

1100 S. Plumer Avenue
Tucson, AZ 85719
www.plasticcapacitors.com

tel: 520.573.0221
fax: 520.573.0520



TYPE: LK-ND

ENERGY STORAGE-DISCHARGE

TYPE LK-ND CAPACITORS are designed primarily for energy storage/discharge applications of high current discharge at low repetition rates. This generally means 30 shots per minute or less. It is advisable to consult our Engineering Staff with your specific application.

APPLICATIONS for this type of capacitor include: **PULSE X-RAY; PHOTOFLASH; LASER PUMPING; PULSE-FORMING NETWORKS; HIGH INTENSITY STROBE** or any other use where high current pulses are to be required or, under fault conditions in the equipment, may be infrequently expected.

CONSTRUCTION of the capacitor is similar to that of MIL-C-19978; **NOT QPL LISTED** it uses a CP70 style military can and is hermetically sealed. All high voltage terminals are of the solder-seal variety; this is an advantage in that it eliminates gasket failure of the hermetic seal, a common fault mode in some capacitor types, as gaskets age and deteriorate. Internally, the individual capacitor elements are wound using extended foil (low inductance) design and the elements are connected to the brass terminal stud with heavy copper braid.

THE IMPREGNANT used in this series is an environmentally safe mineral oil, with a flash point greater than 145°C. It is classified by U.S. O.S.H.A. as a "Class III B combustible" (see 29CFR1910.106.a. 18.ii.b), which is the highest rating for any liquid that can, somehow, be made to burn. NOTE: for specialized applications, even higher temperature impregnates can be used.

TEMPERATURE RANGE is -55°C to +85°C with nameplate voltage applied. In many cases it is possible to operate a capacitor at greater than rated voltage, if the temperature is much less than maximum ambient rating, i.e., room temperature vs. 85°C. Consult our Engineering Staff.

CAPACITANCE TOLERANCE: Standard for this series is $\pm 10\%$ of nominal value. Other tolerances are available on special order.

DIELECTRIC RESISTANCE: See the graph on page A9 of our complete catalog for full details.

POWER (DISSIPATION) FACTOR: although this figure is generally dictated by the type of dielectric film used in the capacitor, it is also affected by the type of oil, wire size, internal connections... in effect, it is the sum of all the factors that will impede the flow of electrons. For the LK-ND series the max. dissipation factor is .005, at 100Hz, at 25°C. See page A9 for details.

EQUIVALENT SERIES RESISTANCE is the function of dissipation factor, frequency and capacitance. ESR for a particular capacitor may be obtained by using the following formulae:

ESR = dissipation factor x capacitive reactance

$$\text{capacitive reactance} = \frac{1}{2 \pi f C}$$

wherein f = frequency in Hz and
 C = capacitance in FARADS

INDUCTANCE also limits the flow of current and, the higher the inductance, the longer the pulse (all other factors being equal). Consult our Engineering Staff for specific inductance values.

ACCEPTANCE TESTS for this series are 100% testing for: capacitance; hermetic seal; dissipation factor; over-voltage. An AQL sample test is performed for insulation resistance. TEST VOLTAGES: terminal to terminal (T-T) will be 200% of rated voltage, nameplate voltages thru 20KVDC; 150% of rated voltage with the nameplate voltages over 20KVDC. The terminal to case (T-C) test voltage is the above figure + 1000VDC. Other tests will be performed at buyer's expense.

PART NUMBERS & descriptions are listed on the reverse of this sheet. In some instances, there are 2 or 3 alternative packaging configurations available for a single voltage/capacitance value. For ratings of 20KVDC and above, an (*) asterisk in the "D" column indicates 1 terminal and case grounded.

MOUNTING BRACKETS, Footed mounting brackets are supplied with these capacitors at no additional cost.



CAUTION: STORED ENERGY

THE STORED ENERGY IN THESE CAPACITORS CAN BE LETHAL. USAGE SHOULD CONFORM TO ACCEPTED ENGINEERING PRACTICES AND CONNECTIONS MADE IN ACCORDANCE WITH FEDERAL, STATE & LOCAL ELECTRICAL CODES.

REMINDER: NEVER TOUCH CAPACITOR TERMINATIONS UNLESS THE CAPACITOR HAS JUST BEEN FULLY DISCHARGED.

TYPE: LK-ND

ENERGY STORAGE-DISCHARGE

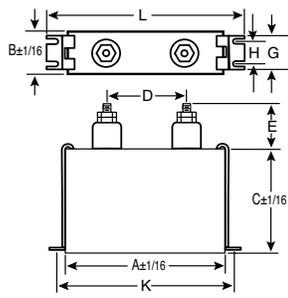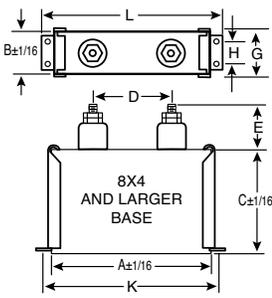

CASE BASE DIMENSIONS A B		FOOTED K BRACKET	SPADE BRACKET	L MAX	G MAX	H	J
1 3/4	1	2 1/2	2 1/16	3 1/16	25/32	*	.213
2 1/2	1 13/16	3 1/4	2 3/4	3 13/16	29/32	*	.213
3 3/4	1 1/4	4 7/16	4	5	29/32	*	.213
3 3/4	1 3/4	4 7/16	4	5	1 1/2		.213
3 3/4	2 1/4	4 11/16	4	5 1/4	2	1 1/4	.213
3 3/4	3 3/16	4 11/16	4	5 1/4	2 7/8	2	.213
4 9/16	3 3/4	4 11/16	4	5 1/4	4 5/16	3 3/8	.213
6	4 11/16	5 11/16	Not Available	6 1/4	4 13/16	4 1/4	.295
7 3/8	5 5/8	6 1/2	Available	7 1/8	6 1/16	5 1/2	.295
8	4	10 1/8		11 1/4	4 9/32	2 1/8	.437
13 1/2	4 1/8	15 5/8		16 3/4	4 13/32	2 1/8	.437
13 1/2	5 1/8	15 5/8		16 3/4	5 13/32	3 1/8	.437

*Single slot or lug centered - J Hole or slot diameter on footed brackets.
 Brackets for base sizes 4⁹/₁₆ x 3³/₄, 6x4 1¹/₁₆, 7⁹/₈ x 5⁵/₈ are mounted on the side parallel to the centerline drawn through the terminals.

The list is not a complete list of stocked parts. Call us for other values.

PART NUMBER	CAP. MFD.	3 KV				
		A	B	C	D	E
LK30-104ND	.1	1 3/4	1	2 1/8	13/16	1 1/8
LK30-254ND	.25	1 3/4	1	2 3/4	13/16	1 1/8
LK30-504ND	.5	1 3/4	1	3 1/2	13/16	1 1/8
LK30-105YND	1.0	2 1/2	1 3/16	4 1/8	1 1/8	1 1/8
LK30-205ND	2.0	2 1/2	1 3/16	6	1 1/8	1 1/8
LK30-205YND	2.0	3 3/4	1 1/4	4	2	1 1/8
LK30-405ND	4.0	3 3/4	1 1/4	6 3/4	2	1 1/8
LK30-405ZND	4.0	3 3/4	2 1/4	4 1/2	2	1 1/8
LK30-505ND	5.0	3 3/4	2 1/4	5 1/4	2	1 1/8
LK30-805ND	8.0	3 3/4	2 1/4	6 3/4	2	1 1/8
LK30-805ZND	8.0	4 9/16	3 3/4	4 1/2	2	1 1/8
LK30-106YND	10.	4 9/16	3 3/4	5 1/4	2	1 1/8
LK30-256YND	25.	4 9/16	3 3/4	10 1/2	2	1 1/8
LK30-306ZND	30.	4 9/16	3 3/4	11 1/4	2	1 1/8
LK30-406ND	40.	7 3/8	5 5/8	6 3/4	2	1 1/8

PART NUMBER	CAP. MFD.	4 KV				
		A	B	C	D	E
LK40-503ND	.05	1 3/4	1	2 1/8	13/16	1 1/8
LK40-105ND	1.0	2 1/2	1 3/16	4 1/2	1 1/8	1 1/8
LK40-205YND	2.0	3 3/4	1 3/4	4 1/4	2	1 1/8
LK40-405ND	4.0	3 3/4	1 3/4	7	2	1 1/8
LK40-505YND	5.0	3 3/4	2 1/4	7 3/4	2	1 1/8
LK40-106ND	10.0	4 9/16	3 3/4	6	2	1 1/8
LK40-126ND	12.0	4 9/16	3 3/4	7	2	1 1/8
LK40-156ND	15.0	4 9/16	3 3/4	9 1/4	2	1 1/8
LK40-206ZND	20.0	4 9/16	3 3/4	11	2	1 1/8

PART NUMBER	CAP. MFD.	5 KV				
		A	B	C	D	E
LK50-104ND	.1	1 3/4	1	2 5/8	13/16	1 1/8
LK50-254ND	.25	1 3/4	1	3	13/16	1 1/8
LK50-504Y	.5	1 3/4	1	5	13/16	1 1/8
LK50-205ND	2.0	3 3/4	1 1/4	6 1/2	2	1 1/8
LK50-405ZND	4.0	4 9/16	3 3/4	4 3/4	2	1 1/8
LK50-106YND	10.0	4 9/16	4 11/16	8 1/4	2	1 1/8
LK50-156YND	15.0	4 9/16	5 1/8	11 1/2	2	1 1/8

PART NUMBER	CAP. MFD.	8 KV				
		A	B	C	D	E
LK80-254ND	.25	3 3/4	1 1/4	3 3/4	2	2 1/8
LK80-504ND	.5	3 3/4	1 1/4	6 1/4	2	2 1/8
LK80-504YND	.5	3 3/4	1 3/4	5 1/2	2	2 1/8
LK80-105YND	1.0	3 3/4	2 1/4	6	2	2 1/8
LK80-205YND	2.0	4 9/16	3 3/4	5 1/2	2	2 1/8
LK80-605YND	6.0	6	4 11/16	10	2	2 1/8
LK80-206YND	20.0	13 1/2	5 1/8	11 7/8	2	2 1/8

PART NUMBER	CAP. MFD.	10 KV				
		A	B	C	D	E
LK100-254ND	.1	3 3/4	1 3/4	3 3/4	2	2 1/8
LK100-504ND	.5	3 3/4	1 3/4	6 1/4	2	2 1/8
LK100-504YND	.5	3 3/4	3 3/16	4 1/4	2	2 1/8
LK100-105YND	1.0	3 3/4	2 1/4	8	2	2 1/8
LK100-205YND	1.0	3 3/4	3 3/16	6	2	2 1/8
LK100-605YND	1.0	4 9/16	3 3/4	5	2	2 1/8
LK100-206YND	2.0	4 9/16	3 3/4	7 1/2	2	2 1/8
LK100-254ND	4.0	8	4	9 1/4	4 1/2	2 1/8
LK100-504ND	4.0	4 9/16	3 3/4	11 1/2	2	2 1/8
LK100-504YND	6.0	7 3/8	5 5/8	9	3	2 1/8
LK100-105YND	8.0	7 3/8	5 5/8	9 3/4	3	2 1/8
LK100-205YND	10.0	13 1/2	4 1/8	11	6 3/4	2 1/8
LK100-605YND	10.0	7 3/8	5 5/8	12 1/8	3	2 1/8
LK100-206YND	20.0	13 1/2	6 1/8	12	6 3/4	2 1/8

PART NUMBER	CAP. MFD.	15 KV				
		A	B	C	D	E
LK150-503ND	.05	3 3/4	1 3/4	3 3/4	2	2 3/4
LK150-104ND	.1	3 3/4	1 3/4	4 1/4	2	2 3/4
LK150-254ND	.25	3 3/4	1 3/4	7	2	2 3/4
LK150-504ND	.5	3 3/4	3 3/16	7	2	2 3/4
LK150-105ND	1.0	4 9/16	3 3/4	9	2	2 3/4
LK150-205YND	2.0	6	4 11/16	9 3/4	2	2 3/4
LK150-505ND	5.0	13 1/2	4 1/8	11 7/8	2	2 3/4
LK150-805ND	8.0	13 1/2	6 1/8	12 1/4	2	2 3/4

PART NUMBER	CAP. MFD.	20 KV				
		A	B	C	D	E
LK200-103ND	.01	3 3/4	2 1/4	3 1/4	2	2 3/4
LK200-203ND	.20	3 3/4	2 1/4	3 1/4	2	2 3/4
LK200-503ND	.05	3 3/4	2 1/4	4	2	2 3/4
LK200-104ND	.1	3 3/4	2 1/4	6	*	2 3/4
LK200-254ND	.25	3 3/4	3 3/16	6 3/4	2	2 3/4
LK200-504ND	.5	4 9/16	3 3/4	8	2	2 3/4
LK200-105ND	1.0	6	4 11/16	9 3/4	2	2 3/4
LK200-105YND	1.0	4 9/16	3 3/4	12	2	2 3/4
LK200-205ND	2.0	13 1/2	4 1/8	11	6 3/4	2 3/4
LK200-205YND	2.0	7 3/8	5 5/8	11	3	2 3/4
LK200-505ND	5.0	13 1/2	6 1/8	12 7/8	6 3/4	2 3/4

PART NUMBER	CAP. MFD.	25 KV				
		A	B	C	D	E
LK250-502ND	.005	3 3/4	3 3/16	4	*	3 7/8
LK250-103ND	.01	3 3/4	3 3/16	4	*	3 7/8
LK250-503ND	.05	3 3/4	3 3/16	4	*	3 7/8
LK250-104ND	.1	3 3/4	2 1/4	6 3/4	*	3 7/8
LK250-254ND	.25	4 9/16	3 3/4	7 1/2	*	3 7/8
LK250-504ND	.5	8	4	9 1/4	*	3 7/8
LK250-504YND	.5	8	4	9 3/4	4 1/2	3 7/8
LK250-105ND	1.0	13 1/2	4 1/8	9 1/4	6 3/4	3 7/8
LK250-205ND	2.0	13 1/2	5 1/8	11 7/8	6 3/4	3 7/8

PART NUMBER	CAP. MFD.	30 KV				
		A	B	C	D	E
LK300-503ND	.05	3 3/4	3 3/16	4	*	3 7/8
LK300-104ND	.1	3 3/4	3 3/16	4	*	3 7/8
LK300-254YND	.25	4 9/16	3 3/16	5 1/2	*	3 7/8
LK300-105YND	1.0	13 1/2	3 3/16	8 3/4	*	3 7/8

PART NUMBER	CAP. MFD.	40 KV				
		A	B	C	D	E
LK400-502ND	.005	4 9/16	3 3/4	5	*	3 7/8
LK400-103ND	.01	4 9/16	3 3/4	5 1/2	*	3 7/8
LK400-203ND	.02	4 9/16	3 3/4	5 1/2	*	3 7/8
LK400-503ND	.05	4 9/16	3 3/4	5 1/2	*	3 7/8
LK400-104ND	.1	4 9/16	3 3/4	9	*	3 7/8
LK400-204ND	.25	13 1/2	4 1/8	9 1/4	6 3/4	3 7/8
LK400-504ND	.5	7 3/8	5 5/8	12 1/8	*	3 7/8

PART NUMBER	CAP. MFD.	50 KV				
		A	B	C	D	E
LK500-203ND	.02	4 9/16	3 3/4	7 1/2	*	3 5/8
LK500-503ND	.05	4 9/16	3 3/4	11	*	3 5/8
LK500-104ZND	.1	6	4 11/16	8	*	3 5/8
LK500-254ND	.25	13 1/2	4 1/8	11	*	3 5/8
LK500-254ZND	.25	7 3/8	5 5/8	11	*	3 5/8
LK500-504YND	.5	13 1/2	5 1/8	13 3/4	*	3 5/8

"D" Dimension Asterisk Indicates One Terminal and Ground Stud.



TYPE: LR SPECIALTY CAPACITORS

TYPE 'LR' Capacitors are made to order only, and are devices primarily for filter or discharge applications. The particular advantages are: very small size, low cost and flexibility of configuration.

TYPE 'LR' CAPACITORS:

1. Have a voltage range from 1000 volts to 10,000 volts DC. The peak ripple rating is adequate for bypass, filter and coupling applications.
2. Can be designed to meet all military and commercial requirements. This does not mean that Type 'LR' is the best unit for all applications, but indicates the flexibility and range is very great.

See How to Order on page 16.

3. Are limited within temperature range of -55°C to 125°C.
4. Can be designed for high current discharge service. The limiting factor for discharge current is a time factor, i.e. while the resonant frequency of Type 'LR' units is very high, the impedance of the load circuit often has quite an effect on the peak current, Type 'LR' can be designed to withstand the maximum short circuit current. The limiting factor is the series resonant frequency of the capacitor.
5. Have a power factor of less than 0.5% at 25°C.
6. High resistivity in the order of 10,000 meg. x mfd.
7. Are a desirable type for potting application. Using the proper housing, binding of the epoxy or potting compound is very good, eliminating voids, air pockets, parting lines, strains on the capacitor element due to terminal cycling, etc.
8. Are very economical. Their economy is due to the lack of housing or due to an inexpensive housing, saving the cost of the housing and the labor required to house it.
9. Are impregnated with a solid material.
10. Will withstand severe shock and vibration when properly mounted.
11. The geometric configuration of the Type 'LR' capacitors is extremely flexible. They are available in tubular form such that for a given capacitance value the diameter and length is variable, and only limited by the necessary volume required. Similarly, the rectangular cross section may also be designed to the required width, thickness and length provided the proper volume is available. Note volume factors indicated at bottom of this column.


There are many possible varieties available and the chart outlines the possibilities:

- A. Terminals
 - (1) axial wire leads (solid or stranded)
 - (2) radial wire leads (solid or stranded)
 - (3) axial studs
 - (4) solder lugs
- B. Extended foil or tab type winding
- C. Housing
 - (1) for potting application using epoxy impregnated electrical paper
 - (2) mylar* wrap and epoxy fill
 - (3) phenolic case


Volume factors for DC filter applications with rated voltage at 65°C—and one dimension 3 inches (approx).

RATED VOLTAGE	CUBIC INCHES PER MFD.	RATED VOLTAGE	CUBIC INCHES PER MFD.
1000V	1.9	5000V	12.0
2000V	3.1	6000V	22.5
3000V	5.6	7500V	36.6
4000V	8.3	10,000V	54.0

TYPE 'LR' Capacitors have many possible variations of shape. All cannot be illustrated, but as a guide some styles are illustrated below.

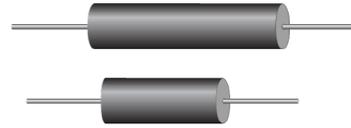

Tubular type with axial leads. This type is available with an impregnated paper wrap and is useful for potting applications or with a Mylar* wrap and epoxy end fill for commercial use exposed to the environment.



Rectangular type with two wire leads from the same end. These leads may be insulated and flexible if desired. Similar to the tubular type illustrated above, an impregnated paper wrap or Mylar* wrap with epoxy end fill are available.



Hermetically sealed, oil filled, rectangular phenolic tube. The illustration shows the means of enclosing three .03 mfd 10 KV capacitors in one case. One stud (not seen) is common to all of three capacitors. Size is 1 1/4"x 2"x 2 3/4"



Rectangular type with axial studs. This item is available with the impregnated paper wrap or Mylar* wrap with an epoxy end fill. Size of this unit is 6 inches long, 4 1/8 inches wide and 1/2 inch thick.



Tubular type with axial studs. Availability similar to illustration at top of column.



Tubular type with axial leads—the container is black phenolic case with an epoxy end fill.

*DUPONT POLYESTER FILM

TYPE: LN and BNZ SPECIALTY CAPACITORS



TYPES LN AND BNZ capacitors are made to order only, for your circuit and physical specifications. The housings are phenolic, with square or rectangular cross-sections. They may be connected in series or parallel to withstand extremely high voltages or produce very large capacitance values.

TYPE LN capacitors are designed primarily for DC filter or energy storage/discharge applications.

1. Voltage range of up to 500,000 VDC per unit.
2. Temperature range of up to 125° C .

Some examples of LN capacitors already manufactured:

PART NUMBER LN200-205A

20KV discharge @ 8000 pps
2.0mfd +20, -10%
Size: 9½ x 18 x 7" high

PART NUMBER LN650-304A

65KVDC filter, with occasional discharge.
.3mfd ±10%
Size: 6¾ x 8¾ x 14½" high

PART NUMBER LN800-204G

80KVDC filter
2 x .1mfd ± 10% (dual capacitor)
Size: 13½ x 6¾ x 11½" high

PART NUMBER LN3000-303A

300KVDC filter, with 30KV P-P ripple
.03mfd ±5%
Size: 7¾" x 9¾" x 39" high

TYPE BNZ capacitors are designed for high frequency voltages, in the radio frequency range or below.

1. Voltage range of up to 100 KV, RMS
2. Temperature range of up to 105°C

Some examples of BNZ capacitors already supplied are:

PART NUMBER BNZ260-283B

2600V, RMS @ 27-60KHZ, 50a RMS
.028mfd ±5%
Size: 6¾ x 4¾ x 5½" high

PART NUMBER BNZ900-203A

9KV RMS @ 50Hz
.02mfd ± 10%
Size: 4¾ x 1¾ x 8¾" high

PART NUMBER BNZ2700-123A

27KV RMS @ 400Hz
.0125mfd—0, +20%
Size: 3¾ x 2¾ x 15" high

PART NUMBER BNZ5000-243A

50KV RMS @ 200Hz
.024mfd ±5%
Size: 6¾ x 3¾ x 17½" high

BOTH TYPES LN & BNZ capacitors can be supplied with or without an integral footed mounting plate.



MOUNTING POSITION: Both types are completely filled, void-free, with mineral oil or silicone fluid impregnant, so that they may be mounted and function in any position.

TERMINATIONS: Screw terminations can be placed in virtually any location on the surface of the capacitors, observing minimum spacing necessary to avoid terminal to terminal arc over.


HOW TO ORDER:

Information required if applicable

1. Specify peak voltage and working voltage
2. Specify capacitance and tolerance
3. Indicate any physical limiting dimensions
4. Almost every application requires some voltage variation or ripple on the capacitor. Indicate the ripple in peak-to-peak of RMS figures. The frequency of the ripple is also very important
5. If the capacitor is to be used for discharge or pulse coupling service it is desirable to know the following:
 - a. peak current of discharge
 - b. time duration of discharge
 - c. voltage to which the capacitor discharges
 - d. amount of discharges per second or per minute
 - e. if a fault condition exists such that the capacitor might be shorted through a very low impedance, (currents of over 50,000 amperes peak are common)
6. If the capacitor is to be used for AC applications indicate
 - a. Frequency
 - b. Current or voltage applied
7. Duty cycle for AC and discharge applications is important.
8. Environment conditions such as operating and storage temperature, vibration and shock, humidity, etc., should be specified when ordering. Specify how the capacitor is to be mounted—vertical or which plane of the horizontal.
10. Specify if unit is to be operated under gas or air—(indicate pressure) or under oil
11. Environmental conditions
12. Life expectancy required
13. Temperature: Operating and non-operating

TYPE: AB

METALIZED MYLAR* CAPACITORS

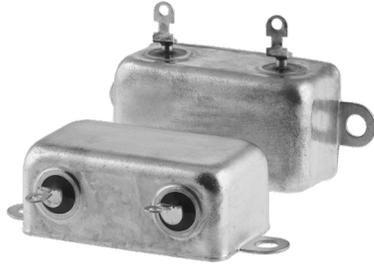

TYPE AB capacitors are designed with the requirements of MIL-C-18312 in mind, Types CH 53 and CH 54, as an economical, non-QPL, substitute. Other styles, such as Type CH 09 or CH 70, are available on special order.

MYLAR *FILM, one of the many dielectrics employed by Plastic Capacitors, Inc. in the fabrication of the highest quality capacitors, offers particular advantages not obtainable with other materials. Mylar* satisfies the requirements of high resistance, low absorption, excellent retrace and capacitance stability over a wide temperature range and high ambient operating conditions.

METALIZED MYLAR* has several advantages that are outstanding. The self-healing characteristics are well-known and extend the useful life of the capacitor. The second, and most over-looked feature, is the possibility of making full use of the highest volts-per-mil rating of the film by eliminating all the weak dielectric areas. This results in extreme small size without sacrificing life, reliability and economy.

WIDE TEMPERATURE RANGE operating and storage, -90°C to 125°C. (Consult specific type listing for complete information.)

CAPACITANCE TOLERANCE standard is 20%. Also available are tolerances of 10%, 5%, 2% and 1%. Nominal values of capacitance of 1 mfd. or less are measured with 1000 Hz applied to the bridge and 60 Hz for nominal values greater than 1 mfd.

INSULATION RESISTANCE at 25°C the RC exceeds 50,000 meg-ohms, but need not exceed 100,000 megohms. Either terminal to case is in excess of 50,000 megohms.

For other temperatures consult "Resistance vs. Temperature" curve for minimum RC, but need not exceed double the minimum value at any temperature.

LOW DIELECTRIC ABSORPTION variable and a function of voltage applied and temperature. (See applicable curves) At room temperature, dielectric absorption is less than 0.3%, when tested in the following manner: Short capacitor for two hours. Apply a stable charging voltage for one hour. Discharge the capacitor for 1/3 second. Periodically read recovery voltage until a maximum is reached. The voltmeter or electrometer should have a terminal resistance of 10¹¹ ohms or more. Percent absorption is defined by:

$$\% \text{ Absorption} = \frac{\text{Max. Recovery voltage} \times 100}{\text{Charge Voltage}}$$





RIPPLE: The sum of the peak ripple voltage plus the DC voltage should not exceed the nameplate voltage. Listed below are acceptable peak to peak ripple voltages in percent of nameplate voltage ratings:

FREQUENCY Hz	PEAK TO PEAK RIPPLE VOLTAGE
60	25%
120	20%
400	10%
1000	8%

POWER FACTOR is a function of frequency, temperature and geometry. (See typical curve of "Power Factor vs. Temperature"). Consult specific type listing for complete information.

APPLICATIONS:


- Computer circuits
- Audio coupling
- Tuned filters
- Pulse forming networks
- Energy storage
- Oscillator circuits
- Power supply filters
- Power factor correction
- Arc and spark suppression
- Integrating circuits
- Audio and RF bypass
- Analog computers
- Low and high pms filters
- Radio frequency coupling

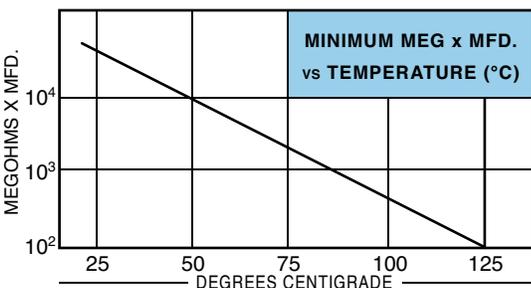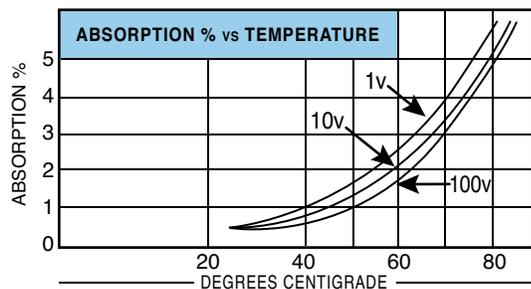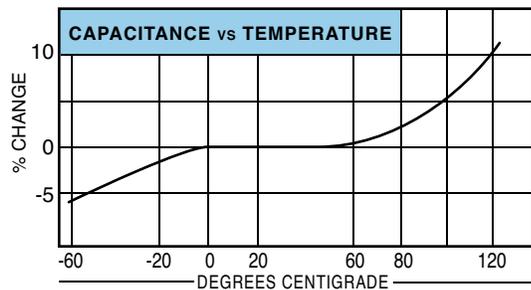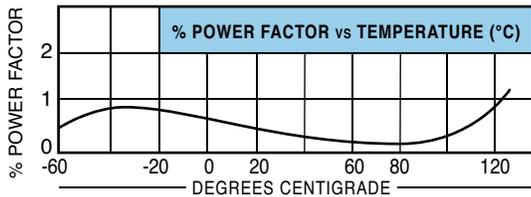

*DUPONT POLYESTER FILM

TYPE: AB

METALIZED MYLAR* CAPACITORS

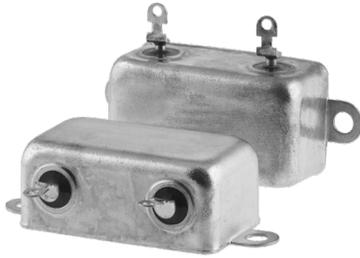

TYPE AB capacitors are metalized Mylar* elements hermetically sealed in a bathtub style container. The self-healing and clearing characteristics make possible the smallest high quality capacitor for the given rating. All units are extended foil construction, assuring low inductance and the ability to handle minute current and voltage differentials over a wide frequency range. The bathtub style solves mounting problems, and the glass solder-seal bushing-terminal assembly is both economical and effective.

HOW TO ORDER: Check listing for voltage and capacitance required and use indicated part number. Add suffix letter:

X for side mounted terminals

Y for top mounted terminals


Z for bottom mounted terminals

Add 20 for standard 20% tolerance, 10, 5, 2 or 1 for 10%, 5%, 2% or 1% tolerance.

PART NUMBER	CAP MFD.	VOLTS DC	CASE SIZE		
			A	B	C
AB2-504	0.5	200	1 1/8	1	13/16
AB2-104	1.0	200	1 1/8	1	13/16
AB2-205	2.0	200	1 1/8	1	13/16
AB2-405	4.0	200	1 3/4	1	3/4
AB2-505	5.0	200	1 3/4	1	3/4
AB2-605	6.0	200	1 3/4	1 1/4	7/8
AB2-805	8.0	200	1 3/4	1 1/4	7/8
AB2-106	10.0	200	2	1 3/4	7/8
AB2-126	12.0	200	2	1 3/4	7/8
AB2-156	15.0	200	2	1 3/4	7/8
AB2-206	20.0	200	2	2	1 1/8
AB2-306	30.0	200	2	2	1 1/4
AB3-504	0.5	300	1 1/8	1	13/16
AB3-105	1.0	300	1 1/8	1	13/16
AB3-205	2.0	300	1 3/4	1	3/4
AB3-405	4.0	300	1 3/4	1 1/4	7/8
AB3-505	5.0	300	2	1 3/4	7/8
AB3-605	6.0	300	2	1 3/4	7/8
AB3-805	8.0	300	2	1 3/4	7/8
AB3-106	10.0	300	2	2	1 1/8
AB3-126	12.0	300	2	2	1 1/8
AB3-156	15.0	300	2	2	1 1/4
AB4-104	0.1	400	1 1/8	1	13/16
AB4-254	0.25	400	1 1/8	1	13/16
AB4-504	0.5	400	1 1/8	1	13/16
AB4-105	1.0	400	1 3/4	1	3/4
AB4-205	2.0	400	1 3/4	1 1/4	7/8
AB4-405	4.0	400	2	1 3/4	7/8
AB4-505	5.0	400	2	2	1 1/8
AB4-605	6.0	400	2	2	1 1/8
AB4-805	5.0	400	2	2	1 1/4
AB6-503	0.05	600	1 1/8	1	13/16
AB6-104	0.10	600	1 1/8	1	13/16
AB6-254	0.25	600	1 1/8	1	13/16
AB6-504	0.50	600	1 3/4	1 1/4	7/8
AB6-104	1.0	600	2	1 3/4	7/8
AB6-205	2.0	600	2	2	1 1/8

*DUPONT POLYESTER FILM

1100 S. Plumer Avenue
Tucson, AZ 85719
www.plasticcapacitors.com

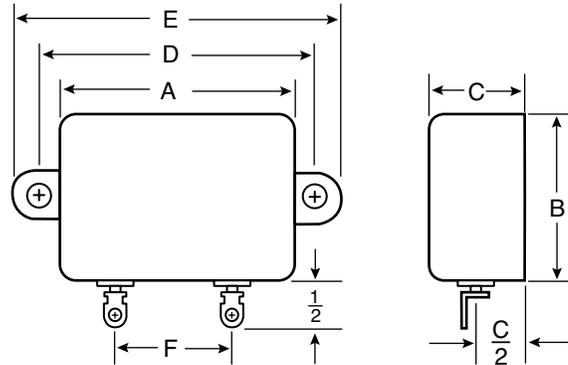

A	B	D	E	F
1 1/8	1	1 7/16	1 3/4	1/2
1 3/4	1	2 1/8	2 1/2	1 1/16
1 3/4	1 1/4	2 1/8	2 1/2	1 1/16
2	1 3/4	2 3/8	2 3/4	1 1/16
2	2	2 3/8	2 3/8	1 1/16

CONTAINER is hot-tinned steel or terneplate, designed to withstand the 100 hour salt spray test of MIL-QQ-151 A.

TERMINALS are solder lugs in a soldered compression seal bushing.

TEMPERATURE RANGE is -90°C to 125°C at full name plate rating **except** all capacitors greater than 10 mfd., with a 200 volt nameplate rating should be derated to 150 volts in the temperature range of 100°C to 125°C.

POWER FACTOR is less than 1% at 25°C. Power factor will be measured at 1000 Hertz for 1 mfd., or less capacitance and at 60 Hertz for nominal values greater than 1 mfd.

TEST CONDITIONS

TEST VOLTAGE terminal to terminal is 200% rated voltage for one minute without a permanent breakdown.

Terminal to case: With both terminals tied together, terminals to case test voltage is 200% rated voltage for two minutes.

The test voltage shall be applied and removed through a resistance of not less than one ohm per volt applied and at room temperature.

LIFE TEST will be conducted at 125°C with a test potential of 120% nameplate voltage applied for 250 hours. One failure of twelve so tested will be permitted. Failure is defined as a permanent short circuit, open circuit, drop in capacitance of 5% or a change in insulation resistance to a value lower than the minimum RC indicated in the insulation resistance paragraph.

TEMPERATURE AND IMMERSION cycling shall be conducted per requirements of MIL-C-25D.

MOISTURE RESISTANCE shall be conducted per requirements of MIL-C-25D.

CORROSION OR SALT SPRAY test shall be conducted according to the 100 hour requirement of MIL-QQ-151 A.

VIBRATION AND SHOCK test shall be performed per MIL-C-25D or MIL-E-5272 (any method).

PRODUCTION HERMETIC SEAL TEST is conducted by immersing the capacitors in silicone fluid at a temperature of 125°C for four minutes. There shall be no appearance of air escaping from the capacitor for the duration of the immersion.

CAPACITANCE TOLERANCE shall be measured at 25°C ± 5°C.




HUMIDITY tests may be performed according to any method of MIL-C-25D, MIL-E-5272A or MIL-E-6400.

tel: 520.573.0221
fax: 520.573.0520



TYPE: H FILM CHARACTERISTICS

LOW POWER FACTOR – HIGH Q

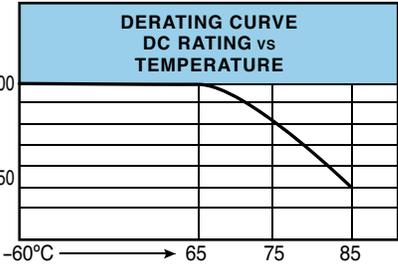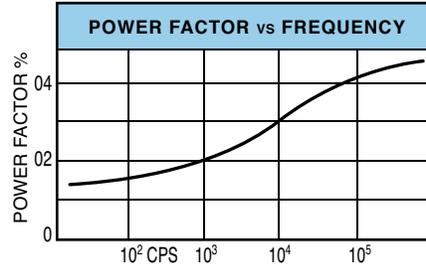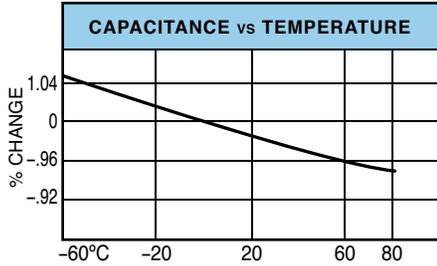

TYPICAL CURVES

TYPE 'H' plastic film used as the solid dielectric of a capacitor results in extremely low power factors. Coupled with a high possible potential gradient, Type 'H' meets a specific need. Type 'HC' is an inexpensive capacitor which will handle very large currents of the AC or pulse type.

TEMPERATURE RANGE -60°C to plus 75°C. Full nameplate ratings to 65°C. Derate to 80% nameplate voltage for operation at 75°C.

CAPACITANCE TOLERANCE standard capacitance tolerance is plus or minus 10%, 5%, and 2%, available on special order.

TEST VOLTAGE is 200% DC nameplate voltage for one minute at 25°C.

LIFE design life of TYPE 'H' capacitors is 10,000 hours at 65°C. A suitable life test is the application of 120% DC nameplate voltage applied for 1000 hours at 65°C ambient temperature. Compliance is indicated with less than two failures of a sample lot of twelve.

IMPREGNANT mineral oil & silicone is the liquid dielectric.

SALT SPRAY all outside surfaces are treated to successfully withstand a 50 hour salt spray. On request, 100 or 150 hour salt spray resistance may be obtained.

IMMERSION all TYPE 'H' capacitors are hermetically sealed and designed to pass the immersion test of MIL-C-25D.

TEMPERATURE COEFFICIENT the temperature coefficient of TYPE 'H' film impregnated with silicone fluid is negative 800 PPM/C.

APPLICATIONS TYPE 'H' capacitors find their major applications in circuits which require low-loss, high voltage and high current carrying capacitors.

- Pulse Forming Networks
- Audio Frequency Bypass
- De-spiking Networks
- Audio Frequency Coupling
- High Frequency Power Factor Correction
- Pulse Coupling Capacitors
- Radio Frequency Bypass
- Power Supply Filters
- Radio Frequency Coupling
- Resonant RF and Audio Circuits


TYPE: HC

PLASTIC FILM PULSE CAPACITORS – CP70 CONTAINER

CASE: CP 70 style rectangular base and squeeze seam covers of lead coated steel. Finish is a coat of synthetic lacquer.

TERMINALS: Are mounted on glazed steatite bushings. Neoprene gaskets or solder seals are used to effect the hermetic seal and a nut and solder lug are provided as part of the terminal assembly. Steatite is used as the insulation between the terminal post and the case for all voltages greater than 1000. All terminal bushings are oil-filled.

BRACKETS: Footed brackets are supplied at no charge. A nominal charge is made for spade screw type brackets. These may be ordered only with capacitors.

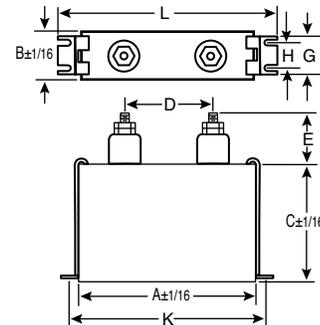

PART NUMBER	CAP MFD.	VOLTS DC	1 KHz PEAK VOLTS	VOLTS PULSE	A	B	C	D	E
HC10-104	0.1	1000	600	800	1 3/4	1	2 1/4	13/16	3/4
HC10-254	0.25	1000	600	800	1 3/4	1	2 1/2	13/16	3/4
HC10-504	0.5	1000	600	800	2 1/2	1 13/16	4 1/2	1 1/8	3/4
HC10-105	1.0	1000	600	800	3 3/4	1 1/4	4	2	3/4
HC10-205	2.0	1000	600	800	3 3/4	1 3/4	4	2	3/4
HC25-104	0.1	2500	1200	1500	2 1/4	1 3/16	2 1/2	1 1/8	1 1/8
HC25-254	0.25	2500	1200	1500	3 3/4	1 1/4	3 1/4	2	1 1/8
HC25-504	0.5	2500	1200	1500	3 3/4	1 3/4	4 1/4	2	1 1/8
HC25-105	1.0	2500	1200	1500	3 3/4	3 3/16	4 1/4	2	1 1/8

TYPE: BVX

SCR/SNUBBER CAPACITORS




TEST VOLTAGE: A DC test voltage range equal to 200% of the rated peak AC voltage for 1 minute, at 25°C.

DESIGN LIFE: Type 'BVX' capacitors is 40,000 hours at +65°C. A suitable life test is the application of a DC voltage equal to 140% of the peak AC voltage for 1000 Hours, at +65°C ambient temperature. Compliance is indicated with less than 2 failures in a sample lot of 12.

TYPE "BVX" CAPACITORS: Designed for demanding usage in the electrical industry to take the "Peak" off of a SCR's pulse, especially for large horsepower motor controls. All items in this series are low inductance, use polypropylene film dielectric. Liquid impregnant has a flash point greater than 200°C.

CAPACITANCE TOLERANCE: ±10% of nominal value; closer tolerance available on special order. Standard 10% value is not marked on capacitors.

TEMPERATURE RANGE: -55°C to +75°C with nameplate voltage applied. Storage temperature range is -55° to +90°C.

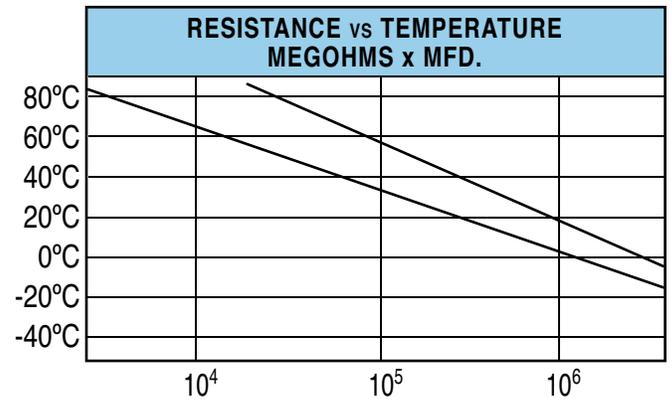

POWER FACTOR: Will not exceed .03% over the operating temperature range, measured at 1 KHz.


MOUNTING: Capacitors are designed to be mounted in any position.

CASE CONSTRUCTION: Cases are drawn oval cans, made of terneplated steel. The cover is double-roll seamed and soldered. Soldering avoids the problems encountered with sealant-gasket techniques. The case is painted with gray lacquer.


TERMINALS: Are glazed steatite, with all sealing points metalized and solder sealed. No gaskets are used, avoiding potential leakage problems. Studs are electro-tinned brass, 1/4-20 threads.

TORQUE: On terminals should not exceed 30 pound-inches.

BRACKETS: Footed mounting brackets are available at extra charge.

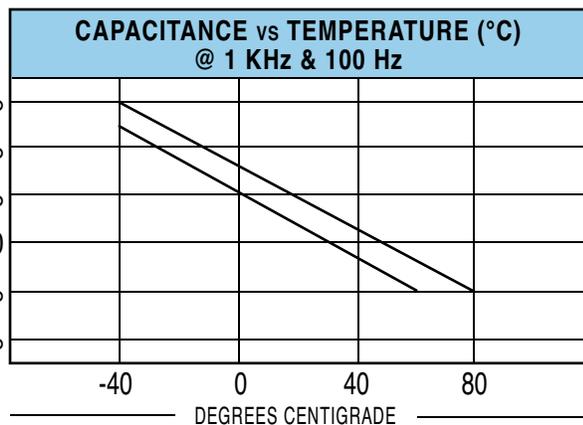

TYPE: BVX SCR/SNUBBER CAPACITORS

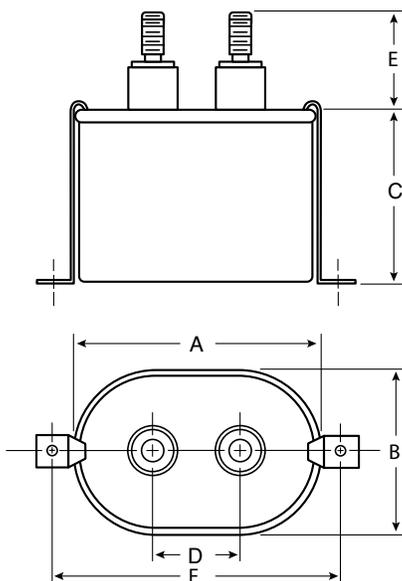

IMPORTANT NOTICE: AT NO TIME SHOULD THE VOLT-AMPERE RATING, GIVEN IN THE FOLLOWING TABLE, BE EXCEEDED. THE FORMULA FOR CALCULATING VOLT-AMPERES IS GIVEN AS FOLLOWS:

- $VA = (E^2) (2\pi f C)$, where E is the voltage in volts
- F is the operating frequency in Hertz
- C is the Capacitance in FARADS

CASE BASE DIMENSIONS		TERMINAL HEIGHT	MOUNTING C-C
A	B	E	F
2.16	1.31	1 1/16	2 7/8
2.91	.91	1	3 9/16
3.66	1.97	1	4 3/8

OTHER VOLTAGE & CAPACITANCE VALUES AVAILABLE. CALL US WITH YOUR SPECIFIC REQUIREMENTS.

PART NUMBER	CAP MFD.	PEAK VOLTS	A +.12 -.06	B ± .06	C +.12 -.06	D ± .03	MAXIMUM VA RATING
BVX35-105	1	350	2.16	1.31	2.88	.81	3610
BVX35-205	2	350	2.16	1.31	2.88	.81	3610
BVX35-305	3	350	2.16	1.31	3.88	.81	4610
BVX35-505	5	350	2.91	1.91	2.62	1.38	4900
BVX35-106	10	350	2.91	1.91	4.75	1.38	7690
BVX35-156	15	350	2.91	1.91	5.75	1.38	9000
BVX35-206	20	350	3.66	1.97	5.75	1.38	12700
BVX35-206	20	350	3.66	1.97	5.75	1.38	12700
BVX60-105	1	600	2.16	1.31	3.88	.81	4610
BVX60-205	2	600	2.16	1.31	4.75	.81	5470
BVX60-305	3	600	2.91	1.91	3.88	1.38	6540
BVX60-505	5	600	2.91	1.91	4.75	1.38	7690
BVX60-106	10	600	3.66	1.97	6.25	1.38	13600
BVX100-105	1	1000	2.16	1.31	3.88	.81	4610
BVX100-205	3	1000	2.91	1.91	3.88	1.38	6540
BVX100-305	3	1000	2.91	1.91	4.50	1.38	7360
BVX100-505	5	1000	2.91	1.91	6.25	1.38	9660


PULSE FORMING NETWORKS



Pulse forming networks are designed for use in circuits which convert direct current or sinusoidal alternating current to unidirectional square pulses at high energy levels for short duration. The performance of the pulse forming network is the heart of the modulator for radar or missile operation.

TYPE 'E' PULSE FORMING NETWORKS: Most commonly used types for radar applications. By definition, a Type 'E' network is defined as having equal capacitance per mesh and mutual inductance between adjacent coils.

The common practice for use of a Type 'E' network is indicated in the circuit Figure A.

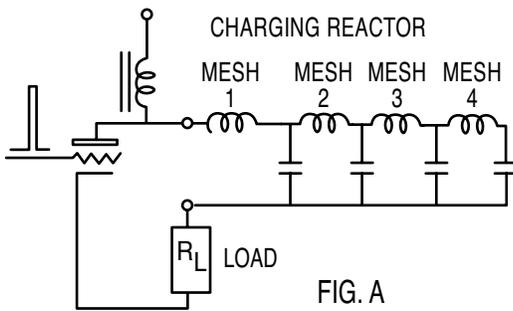

Activating the switch type discharges the energy of the capacitors through the inductors of the pulse forming network, resulting a flat topped wave across R. The squareness of the wave is entirely a function of the number of meshes provided the external circuit is nonreactive. In addition, the energy stored in the network will be completely dissipated into the load R1 when it matches the characteristic impedance of the pulse forming network. Furthermore, the voltage appearing across the load is one-half the voltage at which the network is charged.

The number of MESHES or SECTIONS of a pulse forming network is determined by the rise time requirements and the duration of the pulse width. Basically, the rise time of the network is determined by the rise time of one mesh of the network. Shortening the pulse width of the mesh decreases the rise time. This results in the need for more meshes for a given pulse width. Total capacitance requirements of a Type 'E' pulse forming network.

$$C = \frac{T}{2Z} \text{ where}$$

- C = microfarads
- T = time in microseconds
- Z = characteristic impedance

Capacitance per mesh is the total capacitance divided by the number of meshes.


Similarly, the total inductance is:

$$L = \frac{TZ}{2} \text{ where } L = \text{inductance in microhenrys.}$$


Inductance per mesh is the total inductance divided by the number of meshes.

From the practical standpoint, the first and last inductor are generally larger and the others are smaller. This, in conjunction with proper adjustment of the mutuals between adjacent inductors, results in a flat topped discharge wave.

RISE TIME: Requirement is determined from the magnetron characteristics in conjunction with the pulse transformer and other components in the modulator circuit. A long rise time will result in poor spectrum characteristics and a rise time which is too short might result in magnetron sparking, over-shoots and other undesired characteristics of operation. Far ease of specifying, rise time is generally indicated along the linear portion of the wave front and measured from 10% to 90% of the average peak amplitude. (See Figure B)

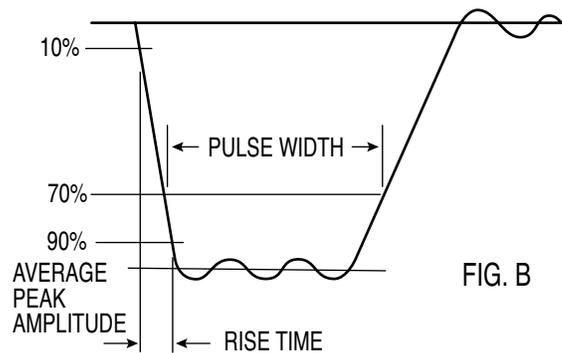

PULSE FORMING NETWORKS

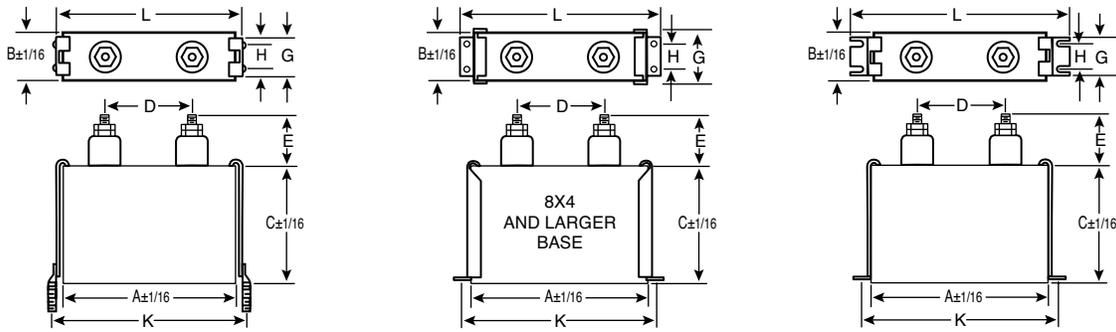

PULSE WIDTH: A requirement which is determined from various factors, such as range of the radar system. Pulse width is ordinarily specified at 70% of the average peak amplitude (the half power point). Pulse width can be fixed accurately in the pulse forming network and remain stable for many years.

Many radar equipments require multiple pulse widths. This can be achieved in two ways, i.e., by the use of individual pulse forming networks in separate or one container. This, ordinarily, is space consuming upon considering the possibilities of the additive network. (See Fig. C)

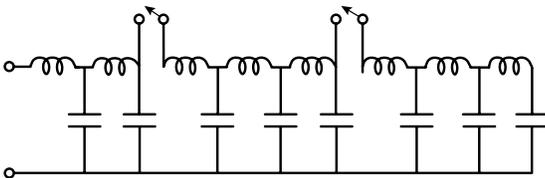


FIG. C

Figure C illustrates a typical additive pulse forming network with the capability of supplying three pulse widths, each working into a nominal design impedance with the same rise time.

RIPPLE: Defined as the voltage excursions above and below the average peak amplitude of the pulse feeding a nonreactive resistance load. Designing and manufacturing pulse forming networks with low ripple requires good basic coil design and close tolerance manufacturing. (See Fig. D)

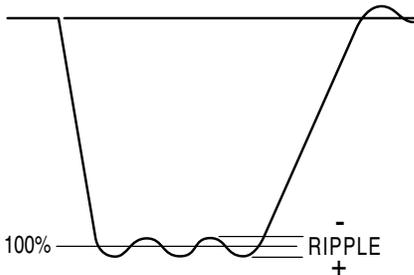


FIG. D

Normal ripple tolerance of 5% for single networks or 7.5% for additive networks excursion from the overage peak amplitude is relatively easy to obtain. This ripple percentage is suitable for many applications. However, it is possible to obtain ripple percentages of plus/minus 2% for single networks and plus/minus 4% for additive networks by closer adjustment of the network component parts.

CASE BASE DIMENSIONS A	B	FOOTED BRACKET K	SPADE BRACKET	L MAX	G MAX	H	J
1 3/4	1	2 1/2	2 1/16	3 1/16	25/32	*	.213
2 1/2	1 3/16	3 1/4	2 3/4	3 13/16	29/32	*	.213
3 3/4	1 1/4	4 7/16	4	5	29/32	*	.213
3 3/4	1 3/4	4 7/16	4	5	1 1/2	5/8	.213
3 3/4	2 1/4	4 11/16	4	5 1/4	2	1 1/4	.213
3 3/4	3 3/16	4 11/16	4	5 1/4	2 7/8	2	.213
4 9/16	3 3/4	4 11/16	4	5 1/4	4 5/16	3 3/8	.213
6	4 11/16	5 11/16	Not Avail.	6 1/4	4 13/16	4 1/4	.213
7 3/8	5 5/8	6 1/2	Avail.	7 1/8	6 1/16	5 1/2	.213
8	4	10 1/8		11 1/4	4 9/32	2 1/8	.437
13 1/2	4 1/8	15 5/8		16 3/4	4 13/32	2 1/8	.437
13 1/2	5 1/8	15 5/8		16 3/4	5 13/32	3 1/8	.437

*Single slot or lug centered-J Hole or slot diameter on footed brackets.

Brackets for base sizes 4 9/16" x 3 3/4", 6 x 4 11/16", and 7 3/8" x 5 5/8" are mounted on the side parallel to the centerline drawn through the terminals.

The listing of two terminal pulse forming networks which follows is intended to give the engineer insight into the effect of variable size and operation. It is especially interesting to note the effect of repetition rate with various types of capacitor dielectrics.

TEMPERATURE RANGE: Is indicated at the head of each listing. Please note column which indicates repetition rate for 10°C rise. The ambient temperature plus the internal heat rise should never exceed the maximum of the temperature range. The design repetition rate is based on still air operation.

Example: Part #NH50-500 has an indicated temperature rise of 10°C for a repetition rate of 500 PPS. The heading indicates a maximum ambient temperature of 75°C. This means that at half power input, the ambient could be raised to 80°C, or if the repetition rate was doubled, resulting in a 20°C internal heat rise, the ambient must be lowered to 65°C.

FORCED AIR COOLING: The addition of cooling fins can increase the power dissipation of the container. This results in a lower internal heat rise for a given repetition rate or for an increased repetition rate for a given internal heat rise.

The low ambient temperature indicates the lowest temperature at which the pulse forming network is guaranteed to work.

DECAY OR FALL TIME: Is approximately three times the value of the rise time for a Type 'E' pulse forming network.



SALT SPRAY: All listed pulse forming networks are designed to withstand a 50 hour salt spray test per MIL-QQ-151A. One-hundred (100) hour withstand is also available.

HUMIDITY: Per paragraph 3.12 humidity cycle of MIL-C-25A or 30 day cycle per MIL-E-5272.

VIBRATION: Per MIL-C-25A. 10 to 55 cps for .060" total excursion traversed once per minute. One hour in each plane and using the mounting clamps as used in end equipment.

TEMPERATURE and IMMERSION CYCLING: Per MIL-C-25A paragraph 4.6.9

LIFE TEST: The pulse forming networks are designed to withstand the following life test:

Life test shall be conducted at the high listed ambient temperature with a KVA equivalent to 1.5 rated KVA by either increasing the repetition rate by 50% or by increasing the charging voltage by 22.5% for a period of 250 hours without failure.

IMPEDANCE: The listed pulse forming networks are established for a matching impedance of 50 ohms plus/minus 5 ohms into a resistive load. All other characteristic measurements are also made with a 50 ohm resistive load. Other impedance values are available. Since the impedance largely determines the size of the network for a given duration, a generality might be made whereby the following is substantially true.

The cubical volume of a pulse forming network is inversely proportional to the matching impedance. This statement is made for the engineer who requires another matching impedance for the purpose of evaluating the approximate size.

NETWORKS NOT LISTED:

ADDITIVE NETWORKS: The engineers of Plastic Capacitors, Inc., are prepared to design additive networks to your specification. High voltage networks with external coils for high power installations, while not commonplace, are being made regularly to specification. Current peaks of 4000 amperes and charging voltage of 80KV are readily achieved and are not the limit of practicability.

HOW TO SPECIFY:

The following information is required for the design of pulse forming networks.


1. Peak charging voltage.
2. Pulse duration - where measured and tolerance.
3. Pulse rise time - where measured and tolerance, if any.
4. Characteristic impedance and tolerance.
5. Repetition rate.
6. Maximum ripple allowable.
7. Temperature range - operational and storage.
8. Operational life required. Describe fully.
9. Decay or fall time, if pertinent.
10. Vibration and shock requirements.
11. Altitude of operation. If pressurized, so state.
12. Forced or natural air circulation.
13. Number of terminals required.
14. Limiting dimensions.
15. Mounting brackets required.
16. Other environmental requirements.
17. Other mechanical requirements such as weight, unusual configuration, etc.

- PULSE FORMING NETWORKS WITH PAPER CAPACITORS
- CHARACTERISTIC IMPEDANCE 50 OHMS
- TEMPERATURE RANGE -40°C TO +55°C

PART NUMBER	MICRO SECOND PULSE	PPS PER 10°C RISE	CASE DIMENSIONS		
			A	B	C
1000 PEAK CHARGING VOLTS					
NP 10-50	0.5		1 3/4	1	2 1/8
NP 10-100	1.0	5000	1 3/4	1	2 1/2
NP 10-200	2.0	4200	2 1/2	1 3/16	2 1/8
NP 10-400	4.0	2100	2 1/2	1 3/16	2 1/8
NP 10-500	5.0	2200	2 1/2	1 3/16	3
NP 10-500	5.0	2200	2 1/2	1 3/16	3
2000 PEAK CHARGING VOLTS					
NP 20-50	0.5	2200	1 3/4	1	2 1/8
NP 20-100	1.0	2100	2 1/2	1 3/16	2 1/8
NP 20-200	2.0	1900	2 1/2	1 3/16	2 1/2
NP 20-400	4.0	700	2 1/2	1 3/16	3
NP 20-500	5.0	700	2 1/2	1 3/16	4
3000 PEAK CHARGING VOLTS					
NP 30-25	0.25	4200	2 1/2	1 3/16	2 1/2
NP 30-50	0.5	2100	2 1/2	1 3/16	2 1/2
NP 30-100	1.0	1200	2 1/2	1 3/16	3
NP 30-200	2.0	780	2 1/2	1 3/16	4
NP 30-400	4.0	380	3 3/4	1 1/4	2 1/2
NP 30-500	5.0	340	3 3/4	1 1/4	3
4000 PEAK CHARGING VOLTS					
NP 40-25	0.25	2400	2 1/2	1 3/16	2 1/2
NP 40-50	0.5	1200	2 1/2	1 3/16	2 1/2
NP 40-100	1.0	700	2 1/2	1 3/16	3
NP 40-200	2.0	440	2 1/2	1 3/16	4
NP 40-400	4.0	240	3 3/4	1 1/4	3
NP 40-500	5.0	220	3 3/4	1 1/4	3 1/2
5000 PEAK CHARGING VOLTS					
NP 50-25	0.25	2100	2 1/2	1 3/16	3
NP 50-50	0.5	1000	2 1/2	1 3/16	3
NP 50-75	0.75	700	2 1/2	1 3/16	3 1/2
NP 50-100	1.0	500	2 1/2	1 3/16	3 1/2
NP 50-200	2.0	335	2 1/2	1 3/16	5
NP 50-400	4.0	200	3 3/4	1 1/4	3 1/2
NP 50-500	5.0	200	3 3/4	1 3/4	4 1/2
7500 PEAK CHARGING VOLTS					
NP 75-10	0.1	2300	2 1/2	1 3/16	3 1/2
NP 75-25	0.25	920	2 1/2	1 3/16	3 1/2
NP 75-50	0.5	500	2 1/2	1 3/16	4
NP 75-75	0.75	410	3 3/4	1 1/4	3 1/2
NP 75-100	1.0	350	3 3/4	1 1/4	4
NP 75-200	2.0	230	3 3/4	1 3/4	4 1/2
NP 75-400	4.0	150	3 3/4	2 1/4	5 1/2
NP 75-500	5.0	140	3 3/4	3 3/16	5 1/2
10,000 PEAK CHARGING VOLTS					
NP100-10	0.1	1900	3 3/4	1 3/4	3 1/4
NP100-25	0.25	760	3 3/4	1 3/4	3 1/4
NP100-50	0.5	430	3 3/4	1 3/4	3 3/4
NP100-75	0.75	300	3 3/4	1 3/4	4
NP100-100	1.0	240	3 3/4	1 3/4	4 1/2
NP100-200	2.0	175	3 3/4	2 1/4	6
NP100-400	4.0	130	4 9/16	3 3/4	6
NP100-500	5.0	140	4 9/16	3 3/4	9
15,000 PEAK CHARGING VOLTS					
NP150-10	0.1	900	3 3/4	1 3/4	4 1/2
NP150-25	0.25	430	3 3/4	1 3/4	5
NP150-50	0.5	320	3 3/4	2 1/4	6
NP150-75	0.75	250	3 3/4	2 1/4	9
NP150-100	1.0	210	3 3/4	3 3/16	7
NP150-200	2.0	170	4 9/16	3 3/4	10
NP150-400	4.0	100	8	8	7
NP150-500	5.0	100	8	8	9 1/4

POWER PACKS

COMPACT 'M' SERIES – 1 to 100 KVDC

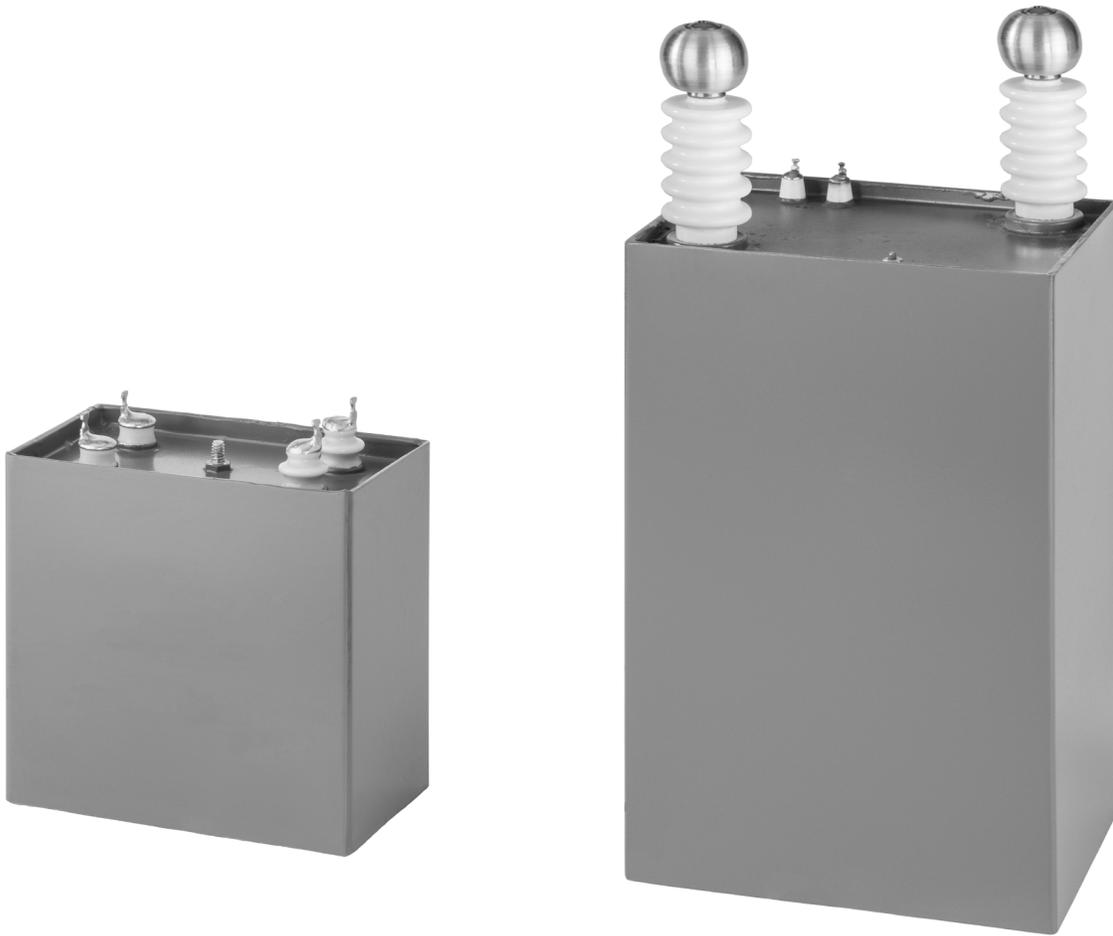

The 'HV-M' suffix power packs were designed with these thoughts in mind. Small size, hermetically sealed, adjustable output voltage by means of adjusting the input voltage, a wide frequency range of input voltage, i.e. 50 to 500 Hz long life, low ripple characteristics, capable of withstanding vibration and shock, and the output independent of the case so either the positive or negative terminal may be grounded.

Standard line input voltages are 118, 220, 230 and 240 volts at frequencies of 50 to 500 hertz. All items can be modified for other input voltages. See 'How To Order' paragraph for proper selection of part numbers.

Grain oriented iron, results in a five-fold advantage. It permits operation of the iron at a much higher magnetization, reducing the size of the transformer and the amount of wire used and consequently the wire losses. The iron losses are also set at a lower value, enabling operation over a wider input frequency range such that the losses are the same or less in the upper frequency range than at the lowest frequency. The transformer is designed with a good order of regulation in mind.

The capacitors are the very smallest high voltage type available which allows the usage of larger values of capacitance and results in better regulation and lower ripple. The silicon rectifiers are the thin wafer high voltage type, which conserve space.

The terminals are the solder seal type, more costly than the standard gasketed type but the usage assures true hermetic sealing.

The containers are steel, hot-tinned or lead coated, and are finished with a primer coat and finish coat of synthetic lacquer.

POWER PACKS

COMPACT 'M' SERIES – 1 to 100 KVDC



20 KV 15 KV 10 KV 5 KV 2 KV

The 'M' Series Power Packs are the most modern design. Long life and a small package directed the use of the latest techniques and advanced materials. Many features have been incorporated with the highest quality materials, at the same time maintaining economy of cost.

THE 'M' SERIES POWER PACKS HAVE THESE TWENTY IMPORTANT FEATURES:

1. **Input:** Voltage standards are 0 to 118V, 220V, 230V and 240V at frequencies from 50 to 500 hertz.*
2. **Output Potentials:** Range from 1000 volts to 100,000 volts. All items can be modified for lower voltages, that is, the 5KV output may be modified to provide 4KV output, etc.
3. **Output Potential:** Can be varied from 0 rated voltage and load by means of a variable auto transformer.
4. **Output currents:** Have been standardized for a maximum of 1.5, 5, 10, or 15 milliamperes. Any unit may be used at a lower current than the nameplate rating.
5. **Ripple:** 1% RMS or 2.75% peak to peak at rated voltage, maximum.
6. **Two Output Terminals:** Are isolated from the container, permitting either terminal to be operated away from ground. CAUTION: The container must be connected to a potential within the range of the POWER PACK, i.e., to some point on the bleeder string if not to a terminal.


EXCEPTION: The HV750-502M, HV750-152M and HVI 000-502M are provided with a single high voltage output terminal. These power packs are normally furnished to deliver a positive output potential relative to ground. If a negative output is desired it can be shipped as such from the factory, Add suffix letter "A".

7. **Ambient Temperature Range:** Is minus 55° C to plus 85°C (with limited ratings).

EXCEPTION: HV375- 103M, HV750-502M and HV1000-502M are limited to an ambient temperature range of 0 to 50°C.

8. **Design Life:**
 40,000 hours at 35°C
 25,000 hours at 65°C
 5,000 hours at 85°C (see note)

NOTE: At 85°C the output current is limited to 80% of the nameplate output current rating. "How To Order" paragraph on next page.

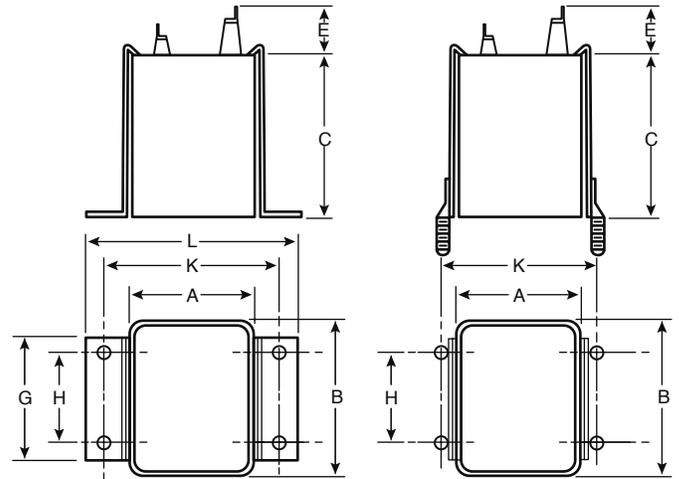

9. **Mounting Position:** Any mounting position can be used except the HV1000-502M, HV750-502M and HV375-103M are designed to operate in an upright position.
 10. **Altitude:** Up to 10,000 feet operating; 50,000 feet non-operating.
 11. **Vibration:** Most power packs are capable of withstanding 10-55 CPS with a total excursion of 0.06 inches for two hours in each plane without failure.
- EXCEPTION:** Type HV1000-502M, HV750-502M and HV375-103M are designed for bench handling, general laboratory use and for use in equipment not subject to excessive shock and handling.
12. **Salt Spray:** Per MIL-QQ-151 for 50 hours.
 13. **Rectifiers:** Are pre-aged long life silicon type, properly selected and used under derated conditions to assure long life.
 14. **Filter Capacitors:** Are special film types of our own manufacture and designed in particular for long life.
 15. **Hermetically Sealed Container Sealing:** Is accomplished with seamed and soldered CP70 type container, and solder seal bushings.
- EXCEPTION:** Type HV375-103M, HV750-502M and HV1000-502M have a neoprene rubber seal between the cover and the container.
16. **Oil Filled Container:** Prevents corona. The oil is inhibited, degassed and filtered.
 17. **Container Finish:** Zinc chromate primer and light green-gray lacquer per MIL-L-7178.
 18. **Terminals:** Are steatite, solder seal type with solder lug or stud terminals.
 19. **Corona:** All power packs with nameplate ratings of 25 kilovolts or more are supplied with aluminum corona spheres for the high voltage terminal(s). This sphere is used to prevent excessive corona discharge and terminal leakage. It is provided with 1/8" diameter holes to accept a miniature banana jack.
 20. **Regulation:** Is given in the power pack listing as approximate output voltage change per milliamperes output with rated input voltage at 60 hertz.

NOTE: Overload Protection is not included in any Power Pack. If overload protection is required, it must be provided by the user.

POWER PACKS

COMPACT 'M' SERIES – 1 to 100 KVDC


'HV-M' POWER PACKS—Variations Available

- 1. OUTPUT MODIFICATION:** Any unit may be modified to a lower DC output voltage at the same or a lower current rating. That is if 3 KV DC output at 3 milliamperes with 118V 60 hertz is required, the HV-50-502M can be modified by substituting the high voltage transformer to suit the requirements.
- 2. INPUT:** Any unit can also be modified, within limits, for various primary voltages. Primaries may be modified, in most units, from 24 volts to 1000 volts.
- 3. CENTER TAPPED OUTPUT:** All units which have a rated output current of 1.5 or 5 milliamperes may be modified to produce half voltage output, both positive and negative, in reference to the container. That is, the HV100-502M may be modified to deliver both positive and negative 5000 volts each at 5 milliamperes. The reference point is the container, and the part number will be HV100-502MT. The suffix letter 'T' indicates the center-tapped output variation.



How to Order:

1. Select part number for voltage and current requirements.
2. If the primary voltage is 0 to 118 volts in the frequency range of 50 to 500 Hz. the part number selected in paragraph 1 is proper.
3. If the primary voltage is 220V, 230V and 240V add suffix 'W' to the part number selected in paragraph 1 .
4. If a center tapped output is required add suffix 'T' to the part number previously selected. See paragraph on variations of the 'HV-M' Power Packs.

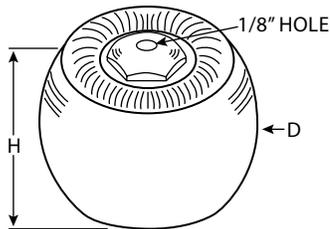

CORONA SPHERES FOR:

	25-50KV	75-100KV
H	1 1/4" HT.	1 3/4" HT.
D	1 1/2" O.D.	2 1/2" O.D.

*SPADE BOLT MOUNTING NOT AVAILABLE

PART NUMBER	KV RANGE	MAX MA.	A	B	C	E	G	H	K FOOTED BKT	L	APPROX. REGULATION VOLTS/MIL	APPROX. WT. LBS.	K SPADE BKT
HV10-152M	0-1	1.5	3 3/4	1 3/4	3 3/8	3/8	29/32	5/8	4 3/8	5 1/4	105	1	4
HV20-152M	0.2	1.5	3 3/4	1 3/4	3 3/8	3/8	29/32	5/8	4 3/8	5 1/4	140	1	4
HV50-152M	0.5	1.5	3 3/4	2 1/4	3 3/8	9/16	2	1 1/4	4 3/8	5 1/4	400	2	4
HV100-152M	0.10	1.5	3 3/4	3 3/16	4 1/2	1	2 7/8	2	4 3/8	5 1/4	1500	4	4
HV150-152M	0.15	1.5	3 3/4	3 3/16	5 1/2	1 11/16	2 7/8	2	4 3/8	5 1/4	1600	4	4
HV200-152M	0.20	1.5	3 3/4	4 9/16	5 7/8	2 1/8	4 5/16	3 3/8	4 3/8	5 1/4	1740	9	4
HV300-152M	0.30	1.5	3 3/4	4 9/16	7 1/2	3 1/4	4 5/16	3 3/8	4 3/8	5 1/4	2100	11	4
HV500-152M	0.50	1.5	4 11/16	6	8 1/2	4 5/16	4 7/8	3 3/8	4 1/4	5 3/8	6000	18	*
HV750-152M	0.75	1.5	5 5/8	7 3/8	12 1/8	6 15/16	6 1/16	5 1/2	6 3/8	7 1/4	4700	45	*
HV10-502M	0.1	5.	3 3/4	2 1/4	3 3/8	3/8	2	1 1/4	4 3/8	5 1/4	60	2	4
HV20-502M	0.2	5.	3 3/4	2 1/4	3 3/8	3/8	2	1 1/4	4 3/8	5 1/4	120	2	4
HV50-502M	0.5	5.	3 3/4	2 1/4	3 3/8	9/16	2	1 1/4	4 3/8	5 1/4	280	3	4
HV100-502M	0.10	5.	3 3/4	4 9/16	5 7/8	1	4 5/16	3 3/8	4 3/8	5 1/4	500	8	4
HV150-502M	0.15	5.	3 3/4	4 9/16	6 1/8	1 11/16	4 5/16	3 3/8	4 3/8	5 1/4	520	11	4
HV200-502M	0.20	5.	3 3/4	4 9/16	8	2 1/8	4 5/16	3 3/8	4 3/8	5 1/4	860	12	4
HV300-502M	0.30	5.	4 11/16	6	8 1/2	3 5/16	4 7/8	4 1/4	5 3/8	6 1/4	1000	22	*
HV500-502M	0.50	5.	5 5/8	7 3/8	12 1/8	4 5/16	6 1/16	5 1/2	6 3/8	7 1/4	1200	40	*
HV750-502M	0.75	5.	11 1/8	14 1/16	16 1/4	7	12 1/2	10 1/2	10 1/2	11 1/8	2200	124	*
HV1000-502M	0.100	5.	16 3/8	22 7/8	14	9	14 1/2	7	22	23	1000	175	*
HV10-103M	0.1	10.	3 3/4	2 1/4	3 3/8	3/8	2	1 1/4	4 3/8	5 1/4	36	2	4
HV25-103M	0.2.5	10.	3 3/4	2 1/4	3 3/4	9/16	2	1 1/4	4 3/8	5 1/4	76	3	4
HV50-103M	0.5	10.	3 3/4	4 9/16	5 7/8	1	4 5/16	3 3/8	4 3/8	5 1/4	137	11	4
HV100-103M	0.10	10.	3 3/4	4 9/16	8	1	4 5/16	3 3/8	4 3/8	5 1/4	265	12	4
HV150-103M	0.15	10.	4 11/16	6	8 1/2	1 11/16	4 7/8	4 1/4	5 3/8	6 1/4	285	20	*
HV250-103M	0.25	10.	5 5/8	7 3/8	12 1/8	3 5/16	6 1/16	5 1/2	6 3/8	7 1/4	300	45	*
HV375-103M	0.37.5	10.	11 1/8	14 1/16	16 1/4	4 3/4	12 1/2	10 1/2	10 1/2	11 1/8	1300	124	*
HV50-153M	0.5	15.	2 3/4	4 9/16	7	1	4 5/16	3 3/8	4 3/8	5 1/4	20	12	4
HV100-153M	0.10	15.	4 11/16	6	8 1/2	1	4 7/8	4 1/4	5 3/8	6 1/4	50	21	*
HV150-153M	0.15	15.	5 5/8	7 3/8	12 1/8	1 3/4	6 1/16	5 1/2	6 3/8	7 1/4	140	45	*
HV200-153M	0.20	15.	5 5/8	7 3/8	12 1/8	2 1/8	6 1/16	5 1/2	6 3/8	7 1/4	150	45	*

SOLID STATE POWER PACKS and FILTERS



GENERAL FEATURES:

Our facilities permit the finished power supply or filter to be a solid epoxy assembly, dipped epoxy, oil filled, air insulated, or any combination of these features. The decision which influences the method of insulation between parts depends on many factors: Voltage, heat generation, size requirements, altitude, shock, vibration, etc.

These power packs or filters can be cased or in open chassis construction, with or without dust covers. Thin rack type units can also be designed. Terminations can be plug-in high voltage connectors, stand-off steatite terminals, or wire leads. Low voltage test points or metering circuits can be included in the design. Filament voltage, or high AC voltage, can also be included.

MATERIALS AND FACILITIES:

Selenium rectifiers are generally used for currents up to 10 milliamperes. Silicon rectifiers are used for higher currents or higher temperatures. Class O, A, B or F insulation is used to meet specific operating temperatures. Special capacitors and transformers designed for the specific power packs and filters are built at PLASTIC CAPACITORS, INC. All basic materials are supplied by well established firms, which maintain high quality level. Components are chosen with adequate deratings to meet specifications. Complete environmental testing facilities are available at our plant.

It is desirable for certain types of apparatus and equipment to design with encapsulated components. The PCI 'F' series consist of filter and rectifier networks, encapsulated in epoxy.

These are vacuum processed and pressure filled to be void free. Epoxies are used which have high thermal shock resistance as well as suitable electrical characteristics. The encapsulated components are made of treated materials which are compatible with the epoxies. Cases are made of an insulating material. The usual finish is light blue-gray lacquer. The resulting package is capable of withstanding thermal and mechanical abuse.

Low voltage terminations are brought out to a solderable lug, or wire lead. High voltage terminations are brought out with high voltage cable, or to high voltage jacks. Mounting provisions are stainless steel studs extending from the base of the case. The following types are available.


HOW TO SPECIFY:

The following information, if pertinent, is required to properly design filters, power supplies, etc. This data will enable the P.C.I. Engineering staff to design the optimum unit.

1. Input Voltage Including Variation
2. Input Frequency Including Variation
3. Output Voltage Including Tolerance
4. Output Current Including Variation and Type of Load
5. Ripple in Percent RMS or Percent Peak to Peak
6. Altitude Operating and Transport
7. Vibration Requirements
8. Humidity and Salt Spray
9. Life Expectancy
10. Terminations
11. Enclosure
12. Metering
13. End Use

'FX' TYPE

These are complete POWER PACKS which operate from 60 cycle or 400 cycle sources. They contain the high voltage transformer, rectifiers, capacitors and resistors.

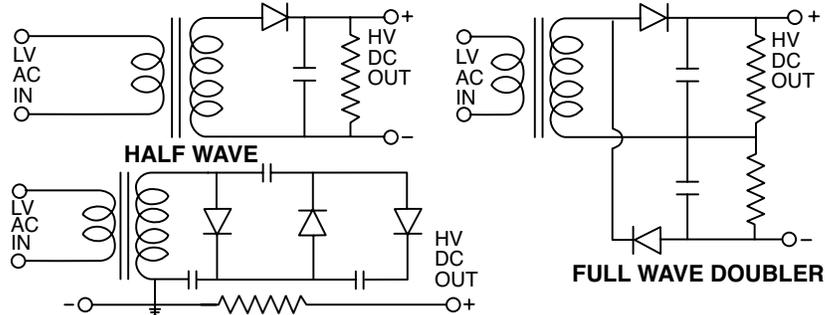


LADDER NETWORK HALF WAVE VOLTAGE TRIPLER

Selenium or silicon rectifiers can be supplied depending on current and temperature requirements. Output potential can be supplied from a 1000 volts up to 25,000 volts DC. Ripple levels as low as 0.1% can be maintained.

'FR' TYPE

The 'FR' Type circuitry consists of rectifiers, capacitors, inductors and resistors as required. They are designed to operate from an external transformer which can be powered by line frequencies of 60 and 400 cycles, and by other sources of power up to 10KC.

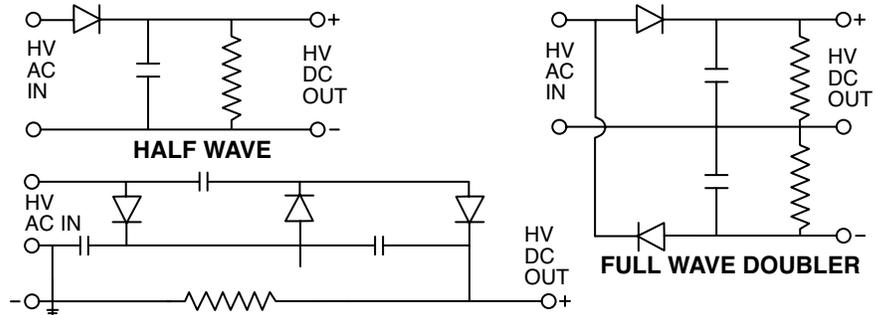


LADDER NETWORK HALF WAVE VOLTAGE TRIPLER

A sine wave, square wave or other wave shape can be used. A considerable size and ripple reduction can be made by operating the POWER PACKS at high frequencies. Half wave or full wave multipliers can be made for low power level units to reduce transformer size.

'FF' TYPE

PCI filter blocks are useful where ripple reduction and small size are necessary. Less output capacitance results which reduces the RC time constant and shock hazard.

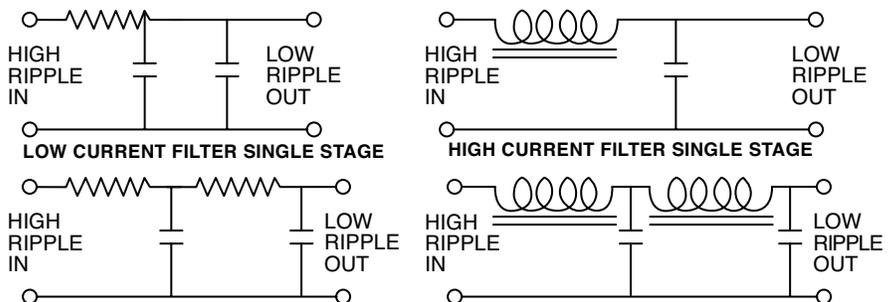

LOW CURRENT FILTER DUAL STAGE

Series resistors or chokes are provided depending on the current and regulation desired. Load currents up to 5ma approximately can economically utilize resistors.

Chokes are more efficient at current levels above 5ma. One or more stages of Pi networks can be included in one or more blocks.



GENERAL INFORMATION

HIGH VOLTAGE TRANSFORMERS are a regular product at P.C.I., whether as a part of one of our standard 'HV-M' series of D.C. power packs or just a plain transformer, sold as such. While we do not have a "standard" line of transformers, we design and build a wide variety of items for O.E.M. and laboratory use.

SIZE LIMITATIONS: Generally speaking, are about 5 KVA for single phase input and 15 KVA for 3 phase input devices. The true limiting factors are the machines on which the transformers are wound. We have the capability to wind wire ranging in size from 5 AWG to 44 AWG. For size comparison, the average human hair is somewhere around 38 to 40 AWG. In some instances, it is necessary to wind the primary of a coil with copper foil and we can wind this material, in widths up to 6 inches, from 1 mil to 10 mil thickness.

CASE STYLES AVAILABLE: Depending upon voltage and current, transformers may be open-frame, encapsulated, in a metal case or a phenolic case oil filled or dry. Most transformers rated 5 KV and higher are in an oil filled container.

IMPREGNATING FLUID is an inhibited, degassed and filtered mineral oil, with a flash point greater than 145°C, when measured in accordance with A.S.T.M. test method D-92 or method 110.0.4 of Federal Specification VV-L-791. Mineral oil is about as environmentally safe as a choice of dielectric fluid as can be found. It is considered by the U.S. Occupational Safety & Health Administration to be a "Class 111-B Combustible."

CONSIDERATIONS WHEN WRITING A TRANSFORMER SPECIFICATION

- 1. REGULATION** the variation in output voltage from no-load to full-load condition, with constant input voltage. Typically, a transformer that is not specifically designated as a "regulated" device may exhibit a 4% regulation factor.
- 2. AMBIENT TEMPERATURE RANGE** must be specified in your requirements. Our oil-filled designs are generally rated to operate from -50°C to +85°C without derating. Higher temperature rating can be achieved with oil-filled units, when needed. In open-frame designs, lower voltage types, a rating of +125°C is common.

- 3. INPUT VOLTAGE AND FREQUENCY** must be specified. While North American power is generally quite constant at 60 Hz, most power utilities have tariff provisions in their service contracts that permit up to a 10% variation in line voltage and "brownout" conditions during peak summer months may result in a drop in frequency. Power lines in other countries deliver a wide variety of voltages and frequencies and may be subject to substantial fluctuations. Military designs that we have provided range from 34 Hz to several KHz, with 400 Hz (for air-born use) being common.

- 4. OUTPUT VOLTAGE AND CURRENT** should be specified at the maximum current levels that the transformer is expected to deliver. In many instances, a maximum voltage and a "Not To Exceed - KVA" rating is justified.

- 5. DUTY CYCLE** is the transformer expected to be operating continuously or, for a laboratory environment, might it be used for only an hour or a minute at a time? Will the transformer be pulsed?

- 6. START GROUNDED** depending upon your specific application, you may require a transformer that has 2 H.V. output terminals, both insulated from ground; or you may specify 1 H.V. terminal with the start of the secondary winding grounded.

- 7. METERING TAPS** when ultra-precise metering is not required, a simple option is to bring a metering tap from the secondary winding, in some reasonable ratio to the over all output, such as 100:1, 500:1, or 1000:1. This will generally give a reading, accurate to within 2%, of the true output of the transformer.

- 8. ISOLATION TRANSFORMERS:** We are often asked to design transformers that will be "floating" at a potential far above ground. This can easily be accomplished by additional insulation, internal to the winding of the transformer.

- 9. SPECIFY AS FOLLOWS:**

Input Voltage & Frequency:

- Duty Cycle
- Maximum Output Voltage & Current Regulation
- Two Terminals (floating) or One Terminal (start grounded)
- Isolation Voltage Required (if any)
- Environmental Conditions of Use

WARNING: HIGH VOLTAGE

THE VOLTAGE POTENTIALS ENCOUNTERED WITH THE USE OF MANY OF THE ITEMS IN THIS CATALOG MAY BE LETHAL. UTMOST CARE SHOULD BE EXERCISED IN THE USE OF THESE PRODUCTS TO ASSURE THAT THE VOLTAGE OR POWER SOURCE IS DISCONNECTED AND THAT THE DEVICE IS PROPERLY GROUNDED AND SHORTED BEFORE SERVICING THE EQUIPMENT INTO WHICH IT IS INSTALLED. INSTALLATION SHOULD COMPLY WITH ALL FEDERAL, STATE AND LOCAL ELECTRICAL CODE REQUIREMENTS.

EXAMPLES OF TRANSFORMERS DESIGNED BY PLASTIC CAPACITORS, INC.

1. P/N TR190-403: Input 135V, 60Hz; output 19KV@ 40ma;
Size 8" X 6" X 8".
2. P/N TRA220-103A: Input 95V, 60Hz; output 22KV@
445ma; WATER COOLED; Size 17" x 14" X 12".
3. P/N TUR150AH88: Input 30V, 512Hz; output 15KV@ 1ma;
Size 6" X 5" X 5"; Center-Tapped.
4. P/N TRZ5VA12K: Input 240V, 60Hz; output 500V@ 24 a;
dry type; Size 12" X 16" X 14".
5. P/N TRI000-503B: Input 110/230V, 60Hz; output
100KV@ 50ma; 2 isolated primaries; phenolic case.
Size 12" X 28" X 17". Note 18° scale on top, for size.
6. P/N TR350-107A: 208V, 60Hz input; 35KV@ 100ma
output; Size 23" X 14" X 14".

**ABOVE SIZES ARE TO THE CLOSEST INCH AND DO NOT
INCLUDE TERMINAL HEIGHT OR MOUNTING BRACKETS.**



Inside back cover

The page is free advertising space.

Great place to promote some of the other ETI companies with two color printing

Cat: PCI-4M-1018



1100 South Plumer Avenue
Tucson, AZ 85719

• *High Voltage Capacitors*

tel: 520-573-0221 fax: 520-573-0520

sales@plasticcapacitors.com

www.plasticcapacitors.com

Electro Technik Industries welcomes you to visit their family of companies.

Magnetics Products

Raycom Electronics, Inc.

P.O. Box 250, 1 Raycom Rd., Dover, PA 17315

tel: 717-292-3641 fax: 717-292-2919

raycomsaleservice@electrotechnik.com

www.raycomelectronics.com

• *Custom Military and Avionics Magnetics*

Inductive Technologies, Inc. (I-Tech)

P.O. Box 18802, Clearwater, FL 33762

tel: 727-532-4459 fax: 727-531-1592

it_sales_service@electrotechnik.com

www.inductech.com

• *Standard Catalog Inductors and Transformers*

Winatic Corporation

P.O. Box 18802, Clearwater, FL 33762

tel: 727-538-8917 fax: 727-531-1592

win_sales_service@electrotechnik.com

www.winatic.com

• *Transformers and Inductors for
Medical Devices and Equipment*

Hytronics Corporation

P.O. Box 18802, Clearwater, FL 33762

tel: 727-535-0413 fax: 727-531-1592

hy_sales_service@electrotechnik.com

www.hytronicscorp.com

• *Power Transformers and Power Inductors*

Capacitive Products

Arizona Capacitors, Inc.

1100 South Plumer Avenue, Tucson, AZ 85719

tel: 520-573-0221 fax: 520-573-0520

azcapsales@electrotechnik.com

www.arizonacapacitors.com

• *Wound Film Capacitors and Electronic Filters*

Custom Suppression, Inc.

1100 South Plumer Avenue, Tucson, AZ 85719

tel: 520-573-0221 fax: 520-573-0520

csisales@electrotechnik.com

www.customsuppression.com

• *Broadband, Microwave, EMI, and RFI Filters,
Filtered Connectors, and Assemblies*

Microwave Products

Res-Net Microwave, Inc.

P.O. Box 18802, Clearwater, FL 33762

tel: 727-530-9555 fax: 727-535-3508

res_sales_service@electrotechnik.com

www.resnetmicrowave.com

• *RF/Microwave Resistors,
Attenuators, Terminations*

Nova Microwave, Inc.

P.O. Box 18802, Clearwater, FL 33762

tel: 408-778-2746 fax: 727-531-8215

novasales@electrotechnik.com

www.novamicrowave.com

• *RF/Microwave Isolators and Circulators*

Star Microwave, Inc.

P.O. Box 18802, Clearwater, FL 33762

tel: 480-286-6994 fax: 727-531-8215

starsales@electrotechnik.com

www.starmicrowave.net

• *Custom Ferrite Isolators and Circulators*

Resistive Products

Tepro of Florida, Inc.

P.O. Box 18802, Clearwater, FL 33762

tel: 727-796-1044 fax: 727-791-7425

tepro_sales_service@electrotechnik.com

www.tepro-vamistor.com

• *Wirewound and Metal Film Resistors*

Vamistor Corporation

P.O. Box 1260, Clearwater, FL 33757

tel: 727-796-1044 fax: 727-791-7425

tepro_sales_service@electrotechnik.com

www.tepro-vamistor.com

• *Carbon Film and RL 42 Resistors*

HYMEG Corporation

P.O. Box 18802, Clearwater, FL 33762

tel: 800-322-1953

sales@hymeg.com

www.hymeg.com

• *High Voltage Resistors*